

## Datasheet

[Get a Quote](#)

### Overview

S5720-52X-LI-AC - Huawei S5700 Series Switches.S5720-52X-LI-AC(48 Ethernet 10/100/1000 ports,4 10 Gig SFP+,AC 110/220V)


### Quick Specification

Model	S5720-52X-LI-AC
Part Number	98010606
Memory (RAM)	512 MB
Flash	512 MB in total. To view the available flash memory size, run the display version command.
PoE	Not supported
Weight with packaging [kg(lb)]	4.4 kg (9.7 lb)
Dimensions (H x W x D)	Basic dimensions (excluding the parts protruding from the body): 43.6 mm x 442.0 mm x 224.9 mm (1.72 in. x 17.4 in. x 8.85 in.) Maximum dimensions (the depth is the distance from ports on the front panel to the parts protruding from the rear panel): 43.6 mm x 442.0 mm x 233.9 mm (1.72 in. x 17.4 in. x 9.21 in.)

## Datasheet

### Product Details:

#### Appearance:

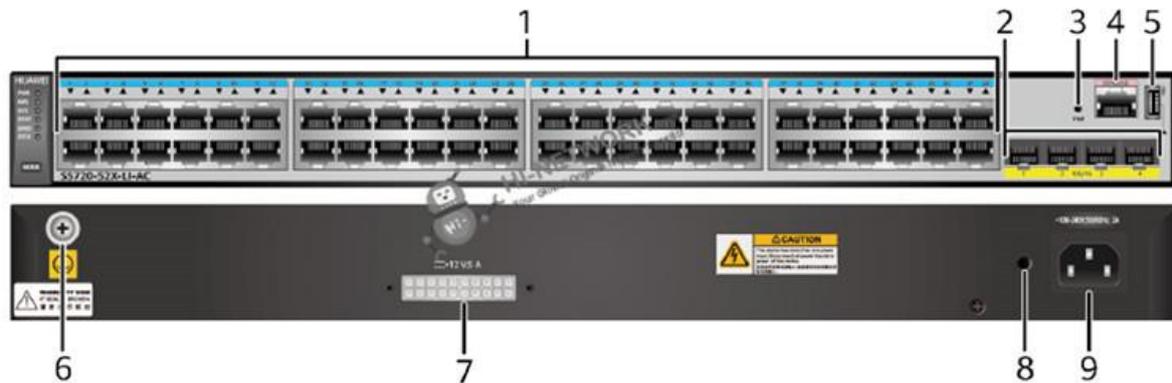

①	Forty-eight 10/100/1000BASE-T ports
②	Four 10GE SFP+ ports
③	One PNP button
④	One console port
⑤	One USB port
⑥	Ground screw
⑦	RPS socket
⑧	Jack for AC power cable locking strap
⑨	AC socket

Get more information:

Do you have any question about the S5720-52X-LI-AC 98010606?

Contact us now via e-mail: [info@hi-network.com](mailto:info@hi-network.com)

### Specific Data Sheet:

Part Number	98010606
Model	S5720-52X-LI-AC
Memory (RAM)	512 MB
Flash	512 MB in total. To view the available flash memory size, run the display version command.

## Datasheet

Mean time between failures (MTBF)	41 years
Mean time to repair (MTTR)	2
Availability	> 0.99999
Service port surge protection	Common mode: $\pm 7$ kV
Power supply surge protection	$\pm 6$ kV in differential mode, $\pm 6$ kV in common mode
Dimensions (H x W x D)	<p>Basic dimensions (excluding the parts protruding from the body): 43.6 mm x 442.0 mm x 224.9 mm (1.72 in. x 17.4 in. x 8.85 in.)</p> <p>Maximum dimensions (the depth is the distance from ports on the front panel to the parts protruding from the rear panel): 43.6 mm x 442.0 mm x 233.9 mm (1.72 in. x 17.4 in. x 9.21 in.)</p>
Weight (with packaging)	4.4 kg (9.7 lb)
Stack ports	Forty-eight 10/100/1000BASE-T ports and four 10G SFP+ ports
RTC	Not supported
RPS	Supported
PoE	Not supported
Rated voltage range	100 V AC to 240 V AC, 50/60 Hz
Maximum voltage range	90 V AC to 264 V AC, 47 Hz to 63 Hz
Maximum power consumption (100% throughput, full speed of fans)	50.3 W
Typical power consumption (30% of traffic load) <ul style="list-style-type: none"> <li>• Tested according to ATIS standard</li> <li>• EEE enabled</li> <li>• No PoE power consumption</li> </ul>	31.6 W
Operating temperature	0°C to 45°C (32°F to 113°F) at an altitude of 0-1800 m (0-5906 ft.)
Short-term operating temperature	-5°C to +55°C (23°F to 131°F) at an altitude of 0-1800 m (0-5906 ft.)
Storage temperature	-40°C to +70°C (-40°F to +158°F)
Noise under normal temperature (27°C, sound power)	< 44.5 dB(A)
Relative humidity	5% to 95%, noncondensing
Operating altitude	0-5000 m (0-16404 ft.)
Certification	EMC certification Safety certification Manufacturing certification

## Want to Buy

[Get a Quote](#)



[Learn More](#) about Hi-Network



[Search](#) our Resource Library



[Follow](#) us on LinkedIn



Contact for [Sales or Support](#)

## Contact HI-NETWORK.COM For Global Fast Shipping

---

HongKong Office Tel: +00852-66181601

HangZhou Office Tel: +0086-571-86729517

Email: [info@hi-network.com](mailto:info@hi-network.com)

Skype: echo.hinetwork

WhatsApp Business: +8618057156223