

Datasheet

[Get a Quote](#)

Overview

Building on high-performance hardware and the Huawei Versatile Routing Platform (VRP), the S5720-LI series switches support intelligent stack (iStack), flexible Ethernet networking, and diversified security control. They support multiple Layer 3 routing protocols and provide high performance and service processing capabilities. The S5720-LI series switches are ideal for various scenarios such as enterprise campus network access and gigabit to the desktop.


Quick Specification

Model	S5720-52P-LI-AC
Part Number	98010774
Memory (RAM)	512 MB
Flash	512 MB in total. To view the available flash memory size, run the display version command.
PoE	Not supported
Weight with packaging [kg(lb)]	4.4 kg (9.7 lb)
Dimensions (H x W x D)	Basic dimensions (excluding the parts protruding from the body): 43.6 mm x 442.0 mm x 224.8 mm (1.72 in. x 17.4 in. x 8.85 in.) Maximum dimensions (the depth is the distance from ports on the front panel to the parts protruding from the rear panel): 43.6 mm x 442.0 mm x 233.8 mm (1.72 in. x 17.4 in. x 9.21 in.)

Datasheet

Product Details:

Appearance:

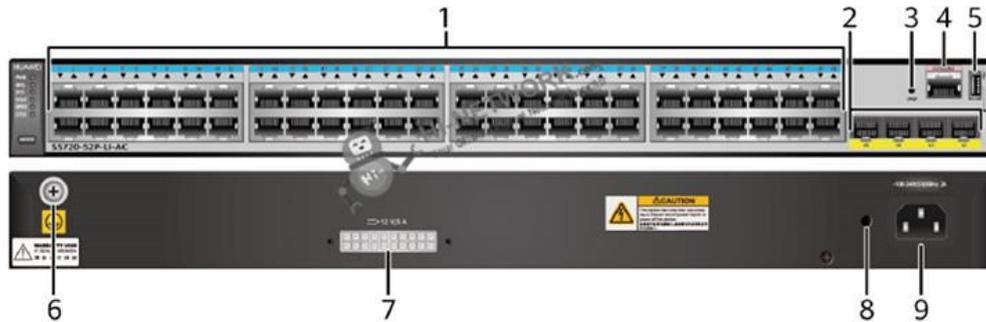

①	Forty-eight 10/100/1000BASE-T ports
②	Four 1000BASE-X ports
③	One PNP button
④	One console port
⑤	One USB port
⑥	Ground screw
⑦	RPS socket
⑧	Jack for AC power cable locking strap
⑨	AC socket

The Accessories for S5720-52P-LI-AC:

Recommended Models:

Model	Description
OMXD30000	Huawei Optical Transceiver OMXD30000, SFP+, 10G, Multi-mode Module (850nm, 0.3km, LC)
SFP-GE-LX-SM1310	Optical Transceiver, eSFP, GE, Single-mode Module (1310nm, 10km, LC)
OMXD30009	Transceiver, QSFP+, 1310nm, 41.25Gbps, -7dBm, 2.3dBm, -11.5dBm, LC, SMF, 10
ESFP-GE-SX-MM850	Optical Transceiver, eSFP, GE, Multi-mode Module (850nm, 0.5km, LC)

Datasheet

Get more information:

Do you have any question about the S5720-52P-LI-AC 98010774?

Contact us now via e-mail: info@hi-network.com

Specific Data Sheet:

Part Number	98010774
Model	S5720-52P-LI-AC
Memory (RAM)	512 MB
Flash	512 MB in total. To view the available flash memory size, run the display version command.
Mean time between failures (MTBF)	41 years
Mean time to repair (MTTR)	2
Availability	> 0.99999
Service port surge protection	Common mode: ± 7 kV
Power supply surge protection	± 6 kV in differential mode, ± 6 kV in common mode
Dimensions (H x W x D)	Basic dimensions (excluding the parts protruding from the body): 43.6 mm x 442.0 mm x 224.9 mm (1.72 in. x 17.4 in. x 8.85 in.) Maximum dimensions (the depth is the distance from ports on the front panel to the parts protruding from the rear panel): 43.6 mm x 442.0 mm x 229.9 mm (1.72 in. x 17.4 in. x 9.05 in.)
Weight (with packaging)	4.4 kg (9.7 lb)
Stack ports	Forty-eight 10/100/1000BASE-T ports and four 1000BASE-X ports
RTC	Not supported
RPS	Supported
PoE	Not supported
Rated voltage range	100 V AC to 240 V AC, 50/60 Hz
Maximum voltage range	90 V AC to 264 V AC, 47 Hz to 63 Hz
Maximum power consumption (100% throughput, full speed of fans)	50.3 W
Typical power consumption (30% of traffic load)	31.6 W
<ul style="list-style-type: none"> Tested according to ATIS standard EEE enabled No PoE power consumption 	
Operating temperature	0°C to 45°C (32°F to 113°F) at an altitude of 0-1800 m (0-5906 ft.)
Short-term operating temperature	-5°C to +55°C (23°F to 131°F) at an altitude of 0-1800 m (0-5906 ft.)
Storage temperature	-40°C to +70°C (-40°F to +158°F)
Noise under normal temperature (27°C, sound)	< 44.5 dB(A)



Datasheet

power)	
Relative humidity	5% to 95%, noncondensing
Operating altitude	0-5000 m (0-16404 ft.)
Certification	EMC certification Safety certification Manufacturing certification

Want to Buy

Get a Quote



[Learn More](#) about Hi-Network



[Search](#) our Resource Library



[Follow](#) us on LinkedIn



Contact for [Sales or Support](#)

Contact HI-NETWORK.COM For Global Fast Shipping

HongKong Office Tel: +00852-66181601

HangZhou Office Tel: +0086-571-86729517

Email: info@hi-network.com

Skype: echo.hinetwork

WhatsApp Business: +8618057156223

