

[Get a Quote](#)

Overview

ISR4451-X-AX/K9 integrated router combines high-performance, scalability, Data Center features and smart router is made to run multiple services. This is the only router in industry separates control data and services planes, so the benefits are numerous. With pay-as-you-grow performance, you can increase forwarding capacity when needed, you only pay for the performance you need. The ISR4451-X-AX/K9 runs multi-core, multi-threaded advanced security IOS-XE operating system to enable both WAN link security and MPLS and OTV services. Full featured WAN optimization with that run native on the motherboard without affecting performance, management and other capabilities. According to the scalability, ISR 4451 designed as a layer 7 router basically, the advanced network services enable the branch to utilize the WAN intelligently is really what ISR 4400 series all about. The Cisco ISR 4451 is the ultimate application delivery platform to mid-size or even large branch offices. This is literally routing redefined.

Quick Specification

Figure 1 shows the appearance of Cisco ISR4451-X/K9 for reference. ISR4451-X-AX/K9 is similar with it.




Table 1 shows the Quick Specification.

Product Code	ISR4451-X-AX/K9
Aggregate Throughput	1 Gbps to 2Gbps
Total onboard WAN or LAN 10/100/1000 ports	4
RJ-45-based ports	4
SFP-based ports	4
Enhanced service-module (SM-X) slot	2

NIM (Network Interface Modules) slots	3
Onboard ISC slot	1
DDRM (data plane)	2 GB (default) / 2 GB (maximum)
DDRM (control/services plane)	4 GB (default) / 16 GB (maximum)
Flash Memory	8 GB (default) / 32 GB (maximum)
Power-supply options	Internal: AC, DC (roadmap) and PoE
Rack height	2 RU
Dimensions (H x W x D)	88.9 x 438.15 x 469.9 mm

Product Details

Figure 2 shows the front panel of Cisco ISR4451-X/K9 for reference. ISR4451-X-AX/K9 is similar with it.

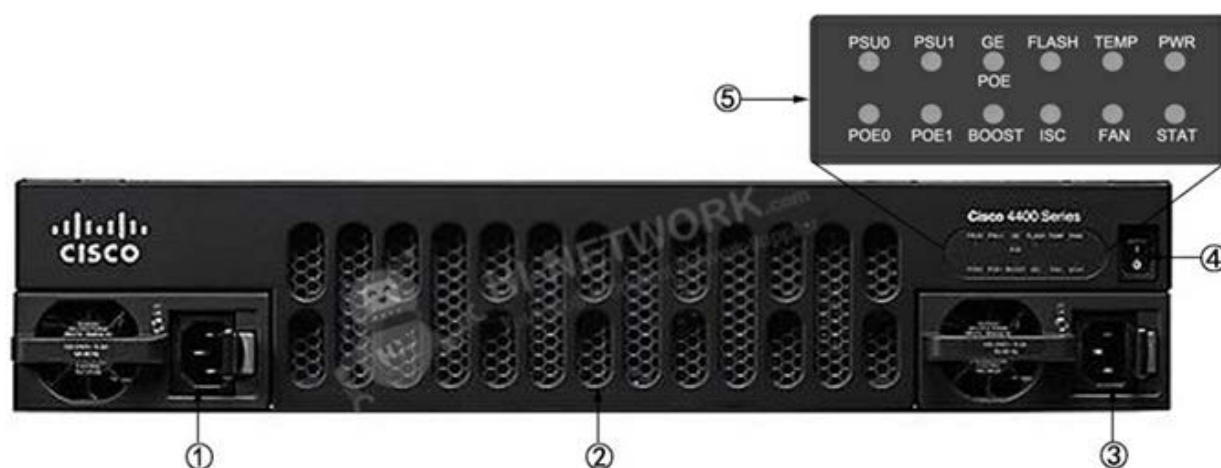

Note:

(1)	AC power supply unit (PSU0)	(4)	Router power On/Off switch
(2)	Router fan tray	(5)	LEDs
(3)	AC power supply unit (PSU1)		


- Router fan tray is hidden behind removable bezel.
- LEDs include 12 indicators.

Table 2 shows the LED descriptions.

LEDs	Represents	Color	Description
PSU	Power Supply Unit (P0 and P1) Status	Green	PSU is on and is providing power.
		Amber	PSU is on but with errors or in a failure condition.
		Off	Power supply is turned off.
GE POE	Internal PoE Daughter Card Status	Green	PSU is installed and providing power
		Amber	PSU is installed but in a failure condition.

		Off	PSU is off.
FLASH	System Flash Status	Blinking Green	Compact flash/eUSB flash is present and currently being accessed.
TEMP	Temperature Status	Solid green	All temperature sensors in the system are within acceptable range.
		Amber	One or more temperature sensors in the system are outside the acceptable range.
		Off	Temperature is not being monitored.
PWR	System Power	Green	System power is on and functioning correctly.
		Green blinking	System power is in the process of shutting down.
		Amber	System power is up, but low-level initialization failed.
		Amber blinking	System power is up, but the system failed to come out of reset.
		Off	System power is off.
POE BOOST	Power Over Ethernet Boost Mode	Green	Two PoE power supplies are installed and operating in boost mode.
		Off	This can mean one of the following: · No PoE PSU installed. · One PoE PSU installed. · Two PoE PSUs installed and operating in redundant mode.
ISC	ISC Slot Status	Green	PVDM4 is present and enabled.
		Amber	Initialized with error.
		Off	Not present.
FAN	Fan Status	Green	All fans are operating.
		Amber	One fan has stopped working.
		Blinking Amber	Two or more fans have stopped working, or the fan tray has been removed.
		Off	Fans are not being monitored.
STAT	System Status	Solid green	System operating normally.
		Blinking amber	BIOS/Rommon is booting.
		Amber	BIOS/Rommon has completed booting, and system is at Rommon prompt or booting platform software.
		Off	System is not out of reset or BIOS image is not loadable.

Figure 3 shows the back panel of Cisco ISR4451-X/K9 for reference. ISR4451-X-AX/K9 is similar with it.

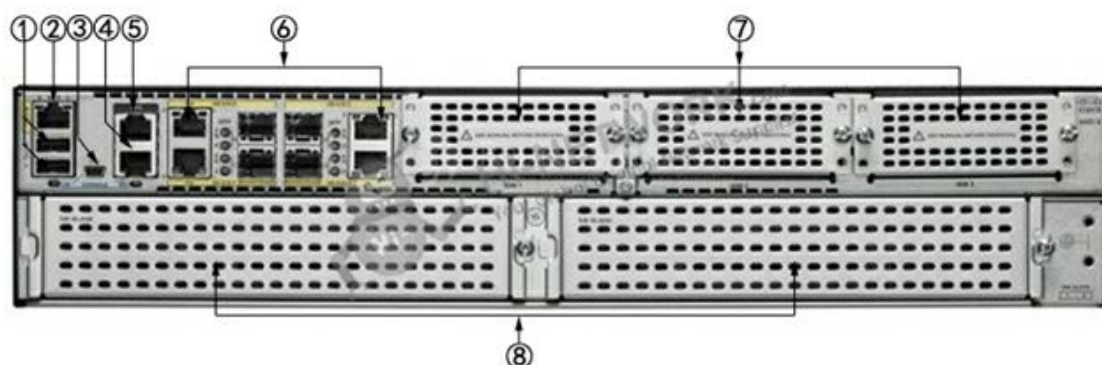

Note:

ISR4451-X-AX/K9 Datasheet

(1)	USB Type A port	(5)	Auxiliary port
(2)	GE management port	(6)	GE Ports
(3)	USB Type B mini port	(7)	NIM Slots
(4)	Console port	(8)	SM-X Slot

- The NIMs support 2 single-wide or 1 double-wide.
- The GE Ports include 4 RJ45 ports and 4 SFP ports.

The Modules, Cards, Licenses & Accessories

Table 3 shows some recommended modules, cards, licenses and several cables.

Items	Models	Descriptions
Console and Auxillary Cables	CAB-AUX-RJ45	Cisco CAB-AUX-RJ45 Auxiliary Cable 8ft with RJ45 and DB25M
	CAB-ETH-S-RJ45	Cisco Router Cable CAB-ETH-S-RJ45
	CAB-CONSOLE-RJ45	Cisco CAB-CONSOLE-RJ45 Console Cable 6ft with RJ45 and DB9F
	CAB-CONSOLE-USB	Cisco CAB-CONSOLE-USB Console Cable 6 ft with USB Type A and mini-B
Licenses	L-SL-44-APP-K9=	Cisco ISR 4431/4451 AppX license L-SL-44-APP-K9= with WAAS/vWAAS 1300/2500 conns RTU
Network Interface Modules	NIM-1MFT-T1/E1	Cisco Fourth-Generation Multiflex Trunk Voice and WAN network interface module
	NIM-2CE1T1-PRI	Cisco Multiflex Trunk Voice and WAN network interface module
	NIM-4E/M	Analog voice network interface card (ear and mouth)
	NIM-2FXS	Cisco Analog voice network interface card NIM-2FXS
	NIM-2FXS/4FXO	Cisco Analog voice network interface card NIM-2FXS/4FXO
	NIM-8MFT-T1/E1	Cisco Fourth-Generation Multiflex Trunk Voice and WAN network interface module
SFPs for On-Board GE Ports	GLC-SX-MMD	Cisco GLC-SX-MMD 1000BASE-SX SFP transceiver module, MMF, 850nm, DOM
	GLC-LH-SMD	Cisco GLC-LH-SMD 1000BASE-LX/LH SFP transceiver module, MMF/SMF, 1310nm, DOM
	GLC-ZX-SMD	Cisco GLC-ZX-SMD 1000BASE-ZX SFP transceiver module, SMF, 1550nm, DOM

Compare to Similar Items

Table 4 shows the comparison chart.

Models	ISR4451-X-AX/K9	ISR4451-X/K9
Description	Cisco ISR 4451 AppX Advanced services router (2GE,2NIM,1SM,8G FLASH,4G DRAM, MPLS, OTV)	Cisco ISR 4451 (4GE,3NIM,2SM,8G FLASH,4G DRAM)
Aggregate Throughput	1 Gbps to 2 Gbps	1 Gbps to 2 Gbps
Total onboard WAN or LAN 10/100/1000 ports	4	4

RJ-45-based ports	4	4
SFP-based ports	4	4
Enhanced service-module slots	2	2
NIM slots	3	3
Onboard ISC slot	1	1
Rack height	2	2

Get More Information

Do you have any question about the Cisco ISR4451-X-AX/K9?

Contact us now via info@hi-network.com.

Specification

ISR4451-X-AX/K9 Specification	
Description	Cisco ISR 4451 AppX Advanced services router (2GE,2NIM,1SM,8G FLASH,4G DRAM, MPLS, OTV)
Aggregate Throughput	1 Gbps to 2Gbps
Total onboard WAN or LAN 10/100/1000 ports	4
RJ-45-based ports	4
SFP-based ports	4
Enhanced service-module slots	2
Doublewide service-module slots	1 (assumes no singlewide SM-X modules installed)
NIM slots	3
OIR (all I/O modules)	Yes
Onboard ISC slot	1
Default memory double-data-rate 3 (DDR3) error-correction-code (ECC) DRAM (Combined control/services/data planes)	NA
Maximum memory DDR3 ECC DRAM (Combined control/services/data planes)	NA
Default memory DDR3 ECC DRAM (data plane)	2 GB
Maximum memory DDR3 ECC DRAM (data plane)	2 GB
Default memory DDR3 ECC DRAM (control/services plane)	4 GB
Maximum memory DDR3 ECC DRAM (control/services plane)	16 GB
Default flash memory	8 GB
Maximum flash memory	32 GB

External USB 2.0 slots (type A)	2
USB console port -type B mini (up to 115.2 kbps)	1
Serial console port - RJ45 (up to 115.2 kbps)	1
Serial auxiliary port - RJ45 (up to 115.2 kbps)	1
Power-supply options	Internal: AC, DC and PoE
Redundant power supply	Internal: AC, DC and PoE
AC input voltage	100 to 240 VAC auto-ranging
AC input frequency	47 to 63 Hz
AC input current range, AC power supply (maximum)	7.1 to 3.0A
AC input surge current	<50 A
Typical power (no modules) (watts)	158
Maximum power with AC power supply (watts)	450 (no PoE)
Maximum power with PoE power supply (platform only) (watts)	1000 with PoE redundant 1450 with PoE boost no redundancy
Maximum endpoint PoE power available from PoE power supply (watts)	500 W with optional redundancy
Maximum endpoint PoE power capacity with PoE boost (watts)	950 W no redundancy

Want to Buy

Get a Quote



[Learn More](#) about Hi-Network



[Search](#) our Resource Library



[Follow](#) us on LinkedIn



Contact for [Sales or Support](#)

Contact HI-NETWORK.COM For Global Fast Shipping

HongKong Office Tel: +00852-66181601

HangZhou Office Tel: +0086-571-86729517

Email: info@hi-network.com

Skype: echo.hinetwork

WhatsApp Business: +8618057156223