



Get a Quote

Overview

WS-C2960CX-8PC-L equips 8 Gigabit Ethernet POE+ ports with 2 x 1 Gigabit copper and 2 x 1 Gigabit SFP uplinks. The POE powers up to 30W/port and supplies total 124W POE budget which can power IP phones, IP Cam or other POE devices.

Quick Specification

Product Code	WS-C2960CX-8PC-L
Feature Set	LAN Base
Uplink Interfaces	2 x 1G copper plus 2 x 1G SFP
Ports	8 x 10/100/1000 Gigabit Ethernet ports
Available POE Power	124W
Forwarding Bandwidth	12 Gbps
Switching Bandwidth (full-duplex capacity)	24 Gbps
RAM	512 MB
Flash Memory	128 MB
Dimensions	4.44 x 26.9 x 23.8 cm
Package Weight	4.65 Kg




Get a Quote



Product Details:

The Front Panel:

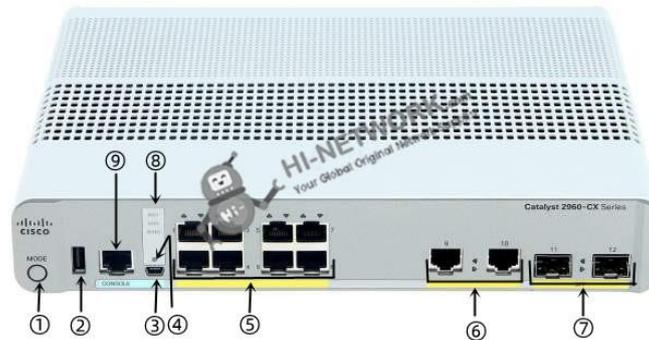

①	Mode button
②	USB Type A port
③	USB mini-Type B (console) port
④	Console LED
⑤	8 x 10/100/1000 ports
⑥	2 x 1 G copper
⑦	SFP module slots
⑧	SYST, STAT, SPEED LED
⑨	RJ-45 Console Port

The three LEDs descriptions.

LED	Color/Port Mode	Description
SYST (System LED)	Off	System is not powered on.
	Green	System is operating normally.
	Amber	System is receiving power but is not operating properly.
STAT	Port status	The port status. This is the default mode.
SPEED	Port speed	The port operating speed: 10, 100, or 1000 Mb/s.
PoE	Off	PoE is not enabled.
	Green	PoE is enabled. Ports are functioning correctly.
	Blinking Amber	-PoE mode is not selected -At least one of the 10/100 or 10/100/100 PoE ports has been denied power



[Get a Quote](#)

		-At least one of the ports has a PoE fault
--	--	--

- The console LEDs show which console port is in use.
- If you connect a cable to a console port, the switch automatically uses that port for console communication. If you connect two console cables, the USB-mini console port has priority.

The Console LED description.

LED	Color	Description
RJ-45 console port	Green	RJ-45 console port is active. USB-mini console port LED is not active.
	Off	Port is not active. USB-mini console port is active.
USB-mini console port	Green	USB-mini console port is active. RJ-45 console port LED is not active.
	Off	Port is not active. RJ-45 console port is active.

The Back Panel:



Accessories For C2960CX:

Modules and Cables:

Part number	Description
-------------	-------------



Get a Quote

CAB-CONSOLE-USB	Cisco CAB-CONSOLE-USB Console Cable 6 ft with USB Type A and mini-B
CAB-CONSOLE-RJ45	Cisco CAB-CONSOLE-RJ45 Console Cable 6ft with RJ45 and DB9F

Compare To Similar Items:

Models	WS-C2960CX-8PC-L	WS-C2960CX-8TC-L
Uplinks	2 x 1G copper or 2 x 1G SFP	2 x 1G copper or 2 x 1G SFP
Ports	8 x 10/100 Fast Ethernet	8 x 10/100/1000 Gigabit Ethernet
Feature set	LAN Base	LAN Base
PoE Power	124W	None

Get more information:

Do you have any question about WS-C2960CX-8PC-L?

Contact us now via e-mail: info@hi-network.com

Specific Data Sheet:

Model	WS- C2960CX-8PC-L
Ethernet Ports	8 x 10/100/1000 Gigabit Ethernet
PoE Output Ports	8 PoE+
Available PoE Power	124W
Uplinks	2 x 1G copper plus 2 x 1G SFP
Default Software	LAN Base
Forwarding Bandwidth	12 Gbps
Switching Bandwidth (full-duplex capacity)	24 Gbps
Flash memory	128 MB
Memory DRAM	512 MB
Max VLANs	255
VLAN IDs	4000
Maximum transmission unit (MTU)	Up to 9000 bytes
Jumbo frames	9198 bytes
Forwarding rate 64 Byte Packet	17.9 mpps
Power connectors	- Customers can provide power to a switch by using the internal power supply. The connector is located at the back of the switch. The internal power supply is an autoranging unit





Get a Quote

	<ul style="list-style-type: none"> - The internal power supply supports input voltages between 100 and 240VAC - Use the supplied AC power cord to connect the AC power connector to an AC power outlet
Indicators	<p>Per-port status: Link integrity, disabled, activity, speed, full-duplex</p> <p>System status: System, link status, link duplex, link speed</p>
Dimensions (H x W x D)	1.75 x 10.6 x 9.4 in (4.44 x 26.9 x 23.8 cm)
Weight	5.0 lb (2.27 Kg)
Package Weight	10.25 lb (4.65 Kg)
Operating* temperature up to 5000 ft (1524 m)	-5°C to +45°C (+23°F to +113°F)
Operating* temperature up to 10,000 ft (3048 m)	-5°C to +45°C (+23°F to +113°F)
Storage temperature up to 15,000 ft (4572 m)	-25°C to +70°C (-13°F to +158°F)
Operating altitude	Up to 3048 m (Up to 10,000 ft)
Storage altitude	Up to 4000 m (Up to 15,000 ft)
Operating relative humidity	5% to 95% noncondensing
Storage relative humidity	5% to 95% noncondensing
Mean time between failure (MTBF)	569,530

Want to Buy

Get a Quote



[Learn More](#) about Hi-Network



[Search](#) our Resource Library



[Follow](#) us on LinkedIn



Contact for [Sales or Support](#)





Contact HI-NETWORK.COM For Global Fast Shipping

HongKong Office Tel: +00852-66181601

HangZhou Office Tel: +0086-571-86729517

Email: info@hi-network.com

Skype: [echo.hinetwork](https://www.skype.com/people/echo.hinetwork)

WhatsApp Business: +8618057156223

