



Get a Quote

Overview

The Cisco Catalyst 2960-Plus Series Switches are fixed-configuration Fast Ethernet switches that provide enterprise-class Layer 2 switching for branch offices, conventional workspaces, and infrastructure applications. They enable reliable and secure operations with lower total cost of ownership through a range of Cisco IOS software features, including Cisco Catalyst Smart Operations.

Quick Specification

Part Number	WS-C2960+24PC-S
Enclosure Type	Rack-mountable – 1U
Feature Set	LAN Lite
Uplink Interfaces	2 (SFP or 1000BASE-T)
Ports	24 x 10/100 Ethernet Ports
Available PoE Power	370W
Forwarding Performance	16 Gbps
RAM	128 MB
Flash Memory	64 MB
Dimensions	45.0 cm x 33.2 cm x 4.4 cm
Package Weight	9.19 Kg




Get a Quote



Product Details:

The Front Panel:

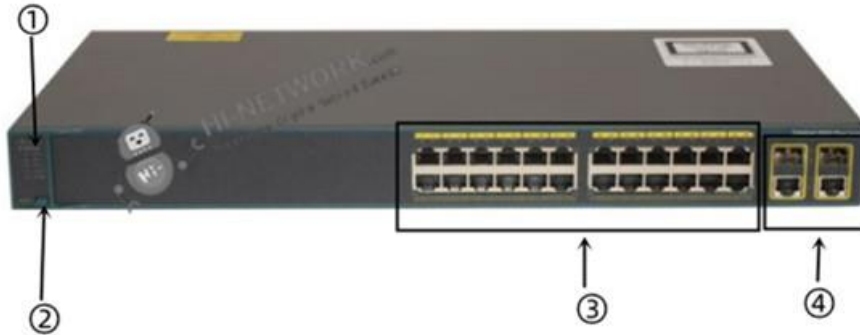

①	Switch LEDs
②	Mode button
③	24*10/100 ports
④	Dual-purpose ports

The Back Panel:



①	RJ-45 console port
②	Fan exhaust
③	RPS connector





Get a Quote

④	AC power connector
---	--------------------

Accessories For WS-C2960+24PC-S:

Modules and Cables:

Model	Description
CAB-CONSOLE-RJ45	Console Cable 6ft with RJ45 and DB9F
GLC-LH-SM	GE SFP, LC connector LX/LH transceiver
GLC-SX-MMD	1000BASE-SX SFP transceiver module, MMF, 850nm, DOM

Compare To Similar Items:

Models	Description
Cisco WS-C2960+24TC-S	Cisco Catalyst 2960 Plus 24 port 10/100M + 2 T/SFP LAN Lite
Cisco WS-C2960+24TC-L	Cisco Catalyst 2960 Plus 24 10/100 + 2T/SFP LAN Base
Cisco WS-C2960+48TC-S	Catalyst 2960 Plus 48 ports 10/100 + 2 T/SFP, LAN Lite
Cisco WS-C2960+48TC-L	Catalyst 2960 plus 48 port 10/100 + 2 T/SFP, LAN Base
Cisco WS-C2960+24PC-S	Catalyst 2960 Plus 24 10/100 PoE + 2 T/SFP, LAN Lite

Get more information:

Do you have any question about WS-C2960+24PC-S?

Contact us now via e-mail: info@hi-network.com

Specific Data Sheet:

Product Number	WS-C2960+24PC-S
10/100 Ethernet Interfaces	24
Uplink Interfaces	2 (SFP or 1000BASE-T)
Cisco IOS Software Feature Set	LAN Lite
Available PoE Power	370W (24 ports up to 15.4W)
RAM	128 MB
Flash Memory	64 MB
Forwarding bandwidth	16 Gbps





Get a Quote

Maximum active VLANs	64
VLAN IDs available	4K
Maximum transmission unit (MTU) - L3 packet	9000 bytes
Jumbo frame - Ethernet frame	9018 bytes
Forwarding Rate: 64-Byte L3 Packets, Millions of packets per second	6.5
Width	17.7 Inches (45.0 cm)
Depth	13.07 Inches (33.2 cm)
Height	1.73 Inches (4.4 cm)
Package Weight	20.26 lb (9.19 Kg)
Weight	12 lb (5.4 Kg)
Operating temperature up to 5000 ft (1500 m)	23°F to 113°F
Operating temperature up to 10,000 ft (3000 m)	23°F to 104°F
Operating altitude	Up to 10,000 feet
Storage altitude	Up to 13,000 feet
Operating relative humidity	10% to 95% noncondensing
Storage relative humidity	10% to 95% noncondensing
Predicted Reliability	381 MTBF in thousands of hours
Input Voltage and Current	100 to 240 VAC / 4.0 - 2.0 / 50 to 60Hz
Power Rating (kVA)	0.43
DC Input Voltages (RPS Input)	2A at 12V / 7A at -52V
Available PoE Power	370W
Safety	UL 60950-1 Second Edition, CAN/CSA-C22.2 No. 60950-1 Second Edition, EN 60950-1 Second Edition, IEC 60950-1 Second Edition, AS/NZS 60950-1
EMC - Emissions	47CFR Part 15 (CFR 47) Class A, AS/NZS CISPR22 Class A, CISPR22 Class A, EN55022 Class A, ICES003 Class A, VCCI Class A, EN61000-3-2, EN61000-3-3, KN22 Class A, CNS13438 Class A



Want to Buy

[Get a Quote](#)

[Learn More](#) about Hi-Network



[Search](#) our Resource Library



[Follow](#) us on LinkedIn



Contact for [Sales or Support](#)

Contact HI-NETWORK.COM For Global Fast Shipping

HongKong Office Tel: +00852-66181601

HangZhou Office Tel: +0086-571-86729517

Email: info@hi-network.com

Skype: [echo.hinetwork](https://www.skype.com/people/echo.hinetwork)

WhatsApp Business: +8618057156223