

Get a Quote

## Overview

The Cisco ASA 5505 Adaptive Security Appliance is a next-generation, full-featured security appliance for small business, branch office, and enterprise teleworker environments. The Cisco ASA 5505 delivers high-performance firewall, SSL and IPsec VPN, and rich networking services in a modular, "plug-and-play" appliance. Using the integrated Cisco ASDM, the Cisco ASA 5505 can be rapidly deployed and easily managed, enabling businesses to minimize operations costs. The Cisco ASA 5505 features a flexible 8-port 10/100 Fast Ethernet switch, whose ports can be dynamically grouped to create up to three separate VLANs for home, business, and Internet traffic for improved network segmentation and security.

The Cisco ASA 5500 Series helps organizations to balance security with productivity. It combines the industry's most deployed stateful inspection firewall with comprehensive next-generation network security services, including:

- Visibility and granular control of applications and micro-applications with behavior-based controls
- Robust security
- Advanced threat protection with a comprehensive, highly effective intrusion prevention system (IPS)
- Highly secure remote access
- Protection from botnets
- Proactive, near-real-time protection against Internet threats

## Quick Specification

Table 1 shows the Quick Specs of the ASA5505-50-AIP5-K8 (USED).

General	
Device Type:	Security appliance
Installed Modules Qty (Max):	1 (1)
Width:	7.9 in
Depth:	6.9 in
Height:	1.7 in
Weight:	4 lbs
Bundled with:	Cisco Advanced Inspection and Prevention Security Services Card 5 (AIP-SSC-5)
Processor / Memory / Storage	
RAM Installed (Max):	256 MB
Flash Memory Installed (Max):	64 MB flash
Networking	
Form Factor:	External
Connectivity Technology:	Wired
Data Link Protocol:	Ethernet, Fast Ethernet


# ASA5505-50-AIP5-K8 Datasheet



**HI-NETWORK.com**  
Your Global Original Network Supplier

Network / Transport Protocol:	IPsec
Performance:	Firewall throughput: 150 Mbps, VPN throughput (3DES/AES): 100 Mbps
Capacity:	IPsec VPN peers: 10, SSL VPN peers: 2, Concurrent sessions: 10000
Features:	Firewall protection, DMZ port, VPN support, VLAN support
Encryption Algorithm:	AES, SSL
Expansion / Connectivity	
Expansion Slots Total (Free):	1 (0) x expansion slot
Interfaces:	6 x network, Ethernet 10Base-T/100Base-TX, RJ-45, 2 x network / power, Ethernet 10Base-T/100Base-TX, RJ-45, 3 x Hi-Speed USB, 4 pin USB Type A, 1 x management, console, RJ-45
Miscellaneous	
Compliant Standards:	CE, VCCI Class B ITE, CISPR 22 Class B, EN 60950, EN 61000-3-2, IEC 60950, EN 61000-3-3, UL 60950, CSA 22.2 No. 60950, EN55022 Class B, FCC Part 15 B, FIPS 140-2 Level 2
Power	
Power Device:	Power adapter, external
Voltage Required:	AC 120/230 V (50/60 Hz)
Environmental Parameters	
Min Operating Temperature:	32 °F
Max Operating Temperature:	104 °F
Humidity Range Operating:	5, 95%

Figure 1 shows the appearance of the ASA5505-50-AIP5-K8 (USED).

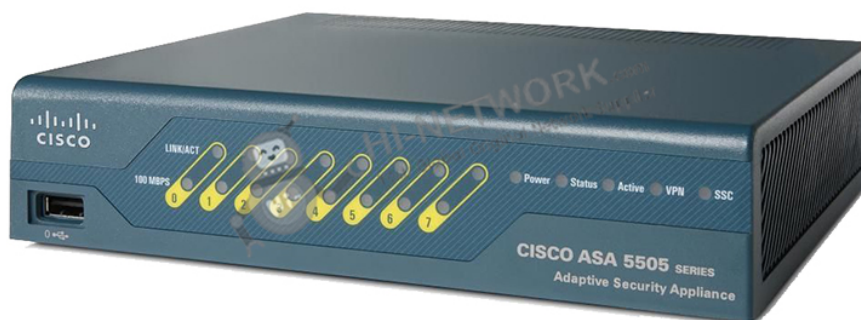

## Get More Information

Do you have any question about the ASA5505-50-AIP5-K8?

Contact us now via [info@hi-network.com](mailto:info@hi-network.com).



## Specification

ASA5505-50-AIP5-K8 (USED) Specification	
General	
Device Type:	Security appliance
Installed Modules Qty (Max):	1 (1)
Width:	7.9 in
Depth:	6.9 in
Height:	1.7 in
Weight:	4 lbs
Bundled with:	Cisco Advanced Inspection and Prevention Security Services Card 5 (AIP-SSC-5)
Processor / Memory / Storage	
RAM Installed (Max):	256 MB
Flash Memory Installed (Max):	64 MB flash
Networking	
Form Factor:	External
Connectivity Technology:	Wired
Data Link Protocol:	Ethernet, Fast Ethernet
Network / Transport Protocol:	IPsec
Performance:	Firewall throughput: 150 Mbps, VPN throughput (3DES/AES): 100 Mbps
Capacity:	IPsec VPN peers: 10, SSL VPN peers: 2, Concurrent sessions: 10000
Features:	Firewall protection, DMZ port, VPN support, VLAN support
Encryption Algorithm:	AES, SSL
Expansion / Connectivity	
Expansion Slots Total (Free):	1 (0) x expansion slot
Interfaces:	6 x network, Ethernet 10Base-T/100Base-TX, RJ-45, 2 x network / power, Ethernet 10Base-T/100Base-TX, RJ-45, 3 x Hi-Speed USB, 4 pin USB Type A, 1 x management, console, RJ-45
Miscellaneous	
Compliant Standards:	CE, VCCI Class B ITE, CISPR 22 Class B, EN 60950, EN 61000-3-2, IEC 60950, EN 61000-3-3, UL 60950, CSA 22.2 No. 60950, EN55022 Class B, FCC Part 15 B, FIPS 140-2 Level 2
Power	
Power Device:	Power adapter, external
Voltage Required:	AC 120/230 V (50/60 Hz)
Environmental Parameters	
Min Operating Temperature:	32 °F

Max Operating Temperature:	104 °F
Humidity Range Operating:	5, 95%

## Want to Buy

Get a Quote



[Learn More](#) about Hi-Network



[Search](#) our Resource Library



[Follow](#) us on LinkedIn



Contact for [Sales or Support](#)

## Contact HI-NETWORK.COM For Global Fast Shipping

HongKong Office Tel: +00852-66181601

HangZhou Office Tel: +0086-571-86729517

Email: [info@hi-network.com](mailto:info@hi-network.com)

Skype: echo.hinetwork

WhatsApp Business: +8618057156223