

Overview


The Cisco C1300-24T-4G is a robust networking switch designed to ensure fast and reliable connectivity within your network infrastructure. Equipped with 24x 10/100/1000 ports, this switch is ideal for both small and medium-sized enterprises needing high performance and scalability. Discover how the Cisco C1300-24T-4G can revolutionize your network environment.

Quick Specification

Table 1 shows the quick specification.

Model	C1300-24T-4G
Dimension	445 x 240 x 44 mm (17.5 x 9.45 x 1.73 in)
Weight	2.63 kg (5.80 lb)
Operating Temperature	23° to 122°F (-5° to 50°C)
Operating Humidity	10% to 90%, relative, noncondensing
Ports	24x 10/100/1000 ports
Combo Ports	4x Gigabit SFP
Form Factor	Fixed Configuration

Figure 1 shows the appearance of C1300-24T-4G.

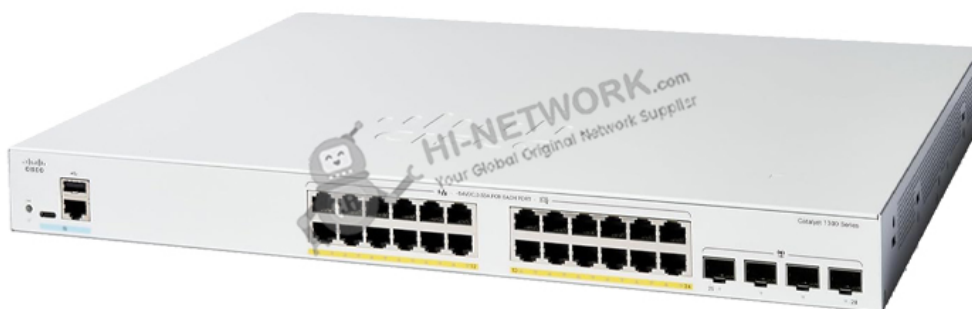

Product Details

Product Features

- 24x 10/100/1000 Mbps Ethernet ports for versatile connectivity options.
- 4x Gigabit uplink ports to enhance network performance and scalability.
- Energy-efficient technology to minimize power consumption.
- Advanced security features to protect your network data.
- Web-based management interface for easy configuration and monitoring.

Product Applications

- Ideal for small to medium-sized business networks requiring high-speed connectivity.
- Perfect for network segments needing enhanced performance and security features.
- Suitable for environments where energy efficiency and cost-effective operation are critical.

Supported Options

Accessory	Model
Power Supply	PWR-C1-715WAC
Mounting Kit	RCKMNT-1RU
Stacking Module	STACK-T1-50CM

Compare to Similar Items

Model	Differences
Cisco C1200-24P-4X	Includes PoE+ support and 10G uplink ports.
Cisco C1400-48T-4G	Provides 48x 10/100/1000 ports and additional expansion modules.
Cisco C1500-24P-8X	Features 8x 10G SFP+ uplink ports and advanced Layer 3 capabilities.

Get More Information

Do you have any questions about the C1300-24T-4G?

Contact us now via info@hi-network.com.



Specification

C1300-24T-4G Datasheet	
Ports	24x 10/100/1000 ports
Combo Ports	4x Gigabit SFP
Mounting	Rack-mountable
Forwarding Rate	41.66 Mpps
Switching Capacity	56.0 Gbps
Power	100-240V 50-60 Hz, internal, universal
Dimension	445 x 240 x 44 mm (17.5 x 9.45 x 1.73 in)
Weight	2.63 kg (5.80 lb)
Operating Temperature	23° to 122°F (-5° to 50°C)
Operating Humidity	10% to 90%, relative, noncondensing
Console port	Cisco standard RJ-45 console port and USB Type C port
USB port	USB Type C port on the front panel of the switch for easy file and image management as well as console port
Buttons	Reset button
Cabling type	Unshielded Twisted Pair (UTP) Category 5e or better for 1000BASE-T
LEDs	System, Link/Act, PoE, Speed
Flash	512 MB
CPU	ARM dual-core at 1.4 GHz
DRAM	1 GB DDR4
Certifications	UL (UL 62368), CSA (CSA 22.2), CE mark, FCC Part 15 (CFR 47) Class A

Want to Buy

Get a Quote

[Learn More](#) about Hi-Network[Search](#) our Resource Library[Follow](#) us on LinkedInContact for [Sales or Support](#)



Contact HI-NETWORK.COM For Global Fast Shipping

HongKong Office Tel: +00852-66181601

HangZhou Office Tel: +0086-571-86729517

Email: info@hi-network.com

Skype: echo.hinetwork

WhatsApp Business: +8618057156223

