

Get a Quote

Overview


IE-4000-8GS4G-E is an IE4000 series switch providing 8 x SFP 1G, 4 x 1G Combo, and LAN Base. The IE 4000 Series is ideal for industrial Ethernet applications where hardened products are required, including manufacturing, energy, transportation, smart cities. The IE4000 has built-in SW image verification to ensure authenticity of the Cisco Software. With improved overall performance, greater bandwidth, advanced security features, and enhanced hardware, the Cisco IE 4000 Series complements the current industrial Ethernet portfolio of related Cisco industrial switches, such as the Cisco IE 2000 and IE 3000.

Quick Specification

Part Number	IE-4000-8GS4G-E
Total Ports	12
GE combo uplinks (4G)	4 GE combo uplink ports
SFP fiber ports (S)	8 GE
Default software	LAN Base feature set
Dimensions (H x W x D)	6.12 x 6.12 x 5.09 in. (155.4 x 155.4 x 129.2 mm)
Weight	6.35 pounds (2.88 kg)

Product Details:

The Front Panel:

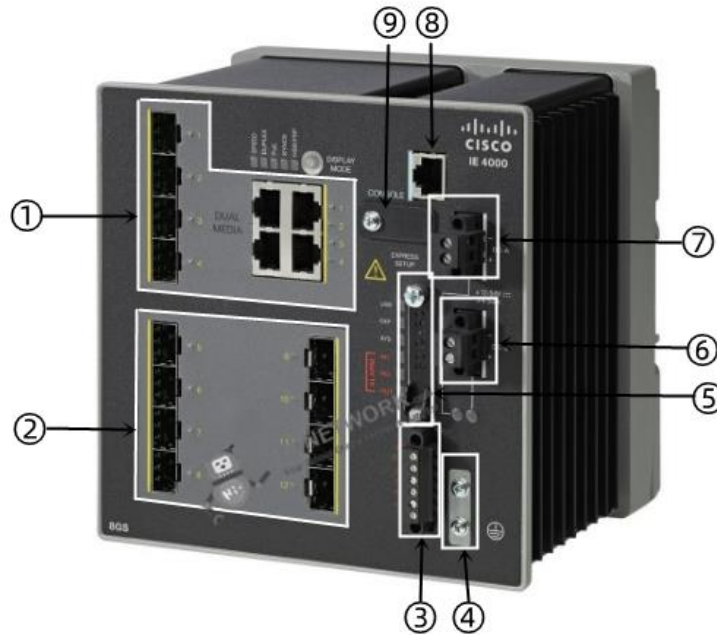

①	4 GE combo uplink ports
②	8GE SFP fiber ports
③	Alarm connector
④	Protective ground connection
⑤	Flash memory card slot
⑥	Power connector DC-B
⑦	Power connector DC-A
⑧	RJ-45 console port
⑨	USB mini-Type B (console) port (Use a screwdriver to remove the port cover and access the port.)

The Back Panel:



The Accessories

Modules and Cables:

Models	Description
L-IE4000-RTU=	Electronic IP SERVICES License for IE4000 Switches
C1F1PIE4K5K1K9	Cisco ONE Foundation Perpetual - IE 4000/5000
C1A1PIE40001K9	Cisco ONE Advanced Perpetual - IE 4000
GLC-SX-MM-RGD	Cisco GLC-SX-MM-RGD 1000Mbps Multi-Mode Rugged SFP
GLC-BX40-U-1	1000BASE-BX10 SFP module for single-strand SMF, 1310-nm TX/1550-nm RX wavelength, single LC/PC connector
GLC-TE	1000BASE-T SFP transceiver module for Category 5 copper wire
GLC-ZX-SM	1000BASE-ZX SFP
GLC-BX-U	1000BASE-BX SFP, 1310NM
SFP-GE-L	1000BASE-LX/LH SFP (DOM)
GLC-ZX-SMD	Cisco GLC-ZX-SMD 1000BASE-ZX SFP transceiver module, SMF, 1550nm, DOM
GLC-SX-MMD	Cisco GLC-SX-MMD 1000BASE-SX SFP transceiver module, MMF, 850nm, DOM
GLC-FE-100EX	100BASE-EX SFP (40km)
GLC-FE-100BX-U	100BASE-BX10-U SFP

Compare To Similar Items

Part Number	IE-4000-8GS4G-E	IE-4000-16T4G-E
Total ports	20	20
GE combo uplinks (4G)	4 GE combo uplink ports	4 GE combo uplink ports
RJ-45 copper ports (T)	N/A	16 FE
SFP fiber ports (S)	8 GE	N/A
Default software	LAN Base feature set	LAN Base feature set

Get more information:

Do you have any question about the IE-3300-8GS4G-E?

Contact us now via e-mail: info@hi-network.com

Specific Data Sheet:

Physical Specification	
Total ports	12
GE combo uplinks (4G)	4 GE combo uplink ports (Combo ports provide one copper and one fiber physical port and only one can be activated at a time.)
SFP fiber ports (S)	8 GE
Default software	LAN Base feature set (Can be upgraded to IP Services at a fee.)
Hardware	<ul style="list-style-type: none"> ● 1GB DRAM ● 128-MB onboard flash memory ● 1-GB removable SD flash memory card ● Mini-USB connector ● RJ-45 connector
Alarms	Alarm I/O: two alarm inputs to detect dry contact open or closed, one alarm output relay
Power inputs	<ul style="list-style-type: none"> ● Redundant DC input voltage with operating range: nominal 9.6 to 60VDC ● Maximum DC input current: 5A
Power consumption	42W
Dimensions (H x W x D)	6.12 x 6.12 x 5.09 in. (155.4 x 155.4 x 129.2 mm)
Weight	6.35 pounds (2.88 kg)
Switch performance and scalability	
Forwarding rate	Line rate for all ports and all packet sizes
Number of queues	4 egress
Unicast MAC addresses	16,000
Internet Group Management Protocol (IGMP) multicast groups	1,000

No. of VLANs	1,000
IPv4 MAC security ACEs	1,000 with default TCAM Template
NAT translation	Bidirectional, 128 unique subnet NAT translation entries, which can expand to tens of thousands of translated entries if designed properly

Want to Buy?

Order Now

Get a Quote



[Learn More about Hi-Network](#)



[Search our Resource Library](#)



[Follow us on LinkedIn](#)



[Contact for Sales or Support](#)

Contact HI-NETWORK.COM For Global Fast Shipping

HongKong Office Tel: +00852-66181601

HangZhou Office Tel: +0086-571-86729517

Email: info@hi-network.com

Skype: echo.hinetwork

