



## Overview

Cisco Catalyst WS-C3650-48PQ-S is the next generation of enterprise-level stable access layer switch and integrates with 48 POE+ Ethernet ports and 4 x 10G SFP uplink ports in IP Base feature set.

## Quick Specification

|   |                                      |
|---|--------------------------------------|
| Product Code                                | WS-C3650-48PQ-S                      |
| Enclosure Type                              | Rack-mountable - 1U                  |
| Feature Set                                 | IP Base                              |
| Uplink Interfaces                           | 4 x 10G SFP+ uplinks                 |
| Ports                                       | 48 x 10/100/1000 POE+ Ethernet ports |
| Available PoE Power                         | 390W                                 |
| Maximum stacking number                     | 9                                    |
| Stack bandwidth                             | 160 Gpbs                             |
| Forwarding Bandwidth                        | 130.95Mpps                           |
| Switching Capacity                          | 176 Gpbs                             |
| RAM   | 4 G                                  |
| Flash Memory                                | 2G                                   |
| Number of AP per switch/stack               | 50                                   |
| Number of wireless clients per switch/stack | 1000                                 |
| Dimensions                                  | 44.5 cm x 44.8 cm x 4.4 cm           |
| Package Weight                              | 17.49 Kg                             |



Get a Quote




**Product Details:**

**The Front Panel:**



|   |                                |
|---|--------------------------------|
| ① | Mode button                    |
| ② | Status LEDs                    |
| ③ | USB mini-Type B (console) port |
| ④ | USB Type A storage port        |
| ⑤ | 48 x 10/100/1000 Ports         |
| ⑥ | Uplink ports                   |

**The Back Panel:**

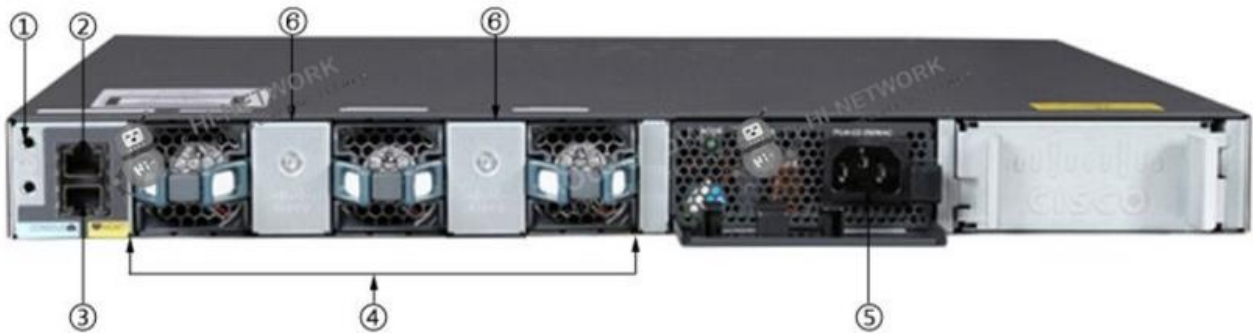

|   |                              |
|---|------------------------------|
| ① | Ground connector             |
| ② | CONSOLE (RJ-45 console port) |





Get a Quote

|   |  |
|---|--|
| ③ | MGMT (RJ-45 10/100/1000 management port) |
| ④ | Fan module                               |
| ⑤ | Power Supply modules                     |
| ⑥ | Stacking modules                         |

## Accessories For C3650:

### Modules and Cables:

| Part number                      | Description  |
|----------------------------------|--|
| C3650-STACK-KIT                  | Cisco Catalyst 3650 Stack Module Spare                 |
| L-C3650-48-S-E=                  | C3650-48 IP Base to IP Services Electronic RTU License |
| PWR-C2-640WAC=                   | 640W AC Config 2 Secondary Power Supply                |
| <a href="#">CAB-CONSOLE-RJ45</a> | Console Cable 6ft with RJ45 and DB9F                   |
| <a href="#">CAB-CONSOLE-USB</a>  | Console Cable 6 ft with USB Type A and mini-B          |

Get more information:

Do you have any question about WS-C3650-48PQ-S?

Contact us now via e-mail: [info@hi-network.com](mailto:info@hi-network.com)

## Specific Data Sheet:

|                              |  |
|------------------------------|--|
| Model                        | WS-C3650-48PQ-S  |
| Enclosure type               | Rack-mountable – 1U  |
| Ports                        | 48 x 10/100/1000 (POE+) + 4 x 10G SFP+   |
| Network management Interface | Ethernet management port: RJ-45 connectors, 4-pair Cat-5 UTP cabling<br>Management console port: RJ-45-to-DB9 cable for PC connections |
| Available PoE Power          | 390W   |
| Switching Capacity           | 176 Gbps   |
| Maximum stacking number      | 9  |
| Stack Bandwidth              | 160 Gbps   |
| Forwarding Performance       | 130.95Mpps   |
| FNF entries                  | Disabled (IP base license required)  |
| Maximum VLANs IDs            | 255  |





Get a Quote

|   |  |
|---|--|
| Maximum VLANs IDs                           | 32K  |
| CPU   | Multicore CPU  |
| RAM   | 4 G  |
| Flash Memory                                | 2 G  |
| Number of AP per switch/stack               | 50   |
| Number of wireless clients per switch/stack | 1000   |
| Total number of WLANs per switch            | 64   |
| Wireless bandwidth per switch               | up to 40 Gbps  |
| Supported Aironet AP series                 | 3700, 3600, 3500, 2600, 1600, 1260, 1140, 1040   |
| Console ports                               | USB (Type-B), Ethernet (RJ-45)   |
| Expansion Slot(s)                           | power redundant slot   |
| Accessory & Rack Mount Kits                 | (1)ACC-KIT-T1: Accessory kit<br>(2)RACK-KIT-T1: Rack mount kit<br>(3)4PT-KIT-T1: Extension rails and brackets for four-point mounting  |
| Stacking module & cable                     | (1)C3650-STACK-KIT: Stack Module<br>(2)STACK-T2-50CM: StackWise-160 stacking cable with a 0.5 m length<br>(3)STACK-T2-1M: StackWise-160 stacking cable with a 1.0 m length<br>(4)STACK-T2-3M: StackWise-160 stacking cable with a 3.0 m length   |
| Power supply                                | PWR-C2-1025WAC   |
| Power Device                                | Power supply – redundant – plug-in module  |
| Power Redundancy                            | optional   |
| Voltage range (Auto)                        | 100V-240V  |
| Power Consumption of standalone (in Watts)  | 107.4 (max)  |
| Width                                       | 17.5 Inches (44.5 cm)  |
| Depth                                       | 17.625 Inches (44.8 cm)  |
| Height                                      | 1.73 Inches (4.4 cm)   |
| Shipping Weight                             | 17.49 Kg   |
| Rack Mounting Kit                           | optional   |
| MTBF in hours                               | 383,760  |
| Compliant Standards                         | <ul style="list-style-type: none"> <li>● IEEE 802.1D Spanning Tree Protocol</li> <li>● IEEE 802.1p CoS Prioritization</li> <li>● IEEE 802.1Q VLAN</li> <li>● IEEE 802.1s</li> <li>● IEEE 802.1w</li> <li>● IEEE 802.1X</li> <li>● IEEE 802.1X-Rev</li> <li>● IEEE 802.11</li> <li>● IEEE 802.1ab (LLDP)</li> </ul> |





Get a Quote

|                                |  |
|--------------------------------|--|
|                                | <ul style="list-style-type: none"> <li>• IEEE 802.3ad</li> <li>• IEEE 802.3x full duplex on 10BASE-T, 100BASE-TX, and 1000BASE-T ports</li> <li>• IEEE 802.3 10BASE-T</li> <li>• IEEE 802.3u 100BASE-TX</li> <li>• IEEE 802.3ab 1000BASE-T</li> <li>• IEEE 802.3z 1000BASE-X</li> <li>• RMON I and II standards</li> <li>• SNMP v1, v2c, and v3</li> </ul>   |
| System software                | IOS IP Base (Upgradable)   |
| EnergyWise license             | ENERGY-MGMT, ENERGY-MGT-100-K9   |
| Software license               | <ul style="list-style-type: none"> <li>• C3650-48-S-E: IP Base to IP Services RTU paper license</li> <li>• L-C3650-48-S-E: IP Base to IP Services RTU electronic license</li> </ul>  |
| Access Point Licenses          | <ul style="list-style-type: none"> <li>• L-LIC-CT3650-UPG: Primary upgrade license SKU for Cisco 3650 wireless controller (e-delivery)</li> <li>• L-LIC-CTIOS-1A: 1 access point adder license for Cisco IOS Software based wireless controller (e-delivery)</li> <li>• L-LIC-CTIOS-1A: 1 access point adder license for Cisco IOS Software based wireless controller (e-delivery)</li> <li>• LIC-CTIOS-1A: 1 access point adder license for the Cisco IOS Software based wireless controller (paper license)</li> </ul>   |
| Features                       | <ul style="list-style-type: none"> <li>• EEM • RPS Support • IP service-level agreements (SLAs) • Advanced IP unicast routing protocols</li> <li>• Jumbo Frames • VLANS • Voice Vlan • VTPv2 • CDPv2 • LLDP</li> <li>• 802.3ad LACP and PAgP • PVST/PVST+ • 802.1W/802.1S • Port Fast/Uplink Fast • Dynamic Trunking Protocol (DTP) • port CoS Trust and Override</li> <li>• Trusted Boundary • ACL Classification • ingress Policing • Auto QoS • Per VLAN policies • 802.1p queues</li> <li>• Scheduling • Priority Queuing • Configure CoS Priority Queues • Configure CoS Priority Queues • Configure Queue Weights • Configure Buffers and Thresholds • Class &amp; Policy Maps</li> <li>• Modify CoS and DSCP Mapping • Weighted Tail Drop • IGMPv1,v2,v3 and MLDv1, v2 • DHCP server</li> <li>• DSCP transparency • HSRP, VRRP, BGP • RIPv1, v2 EIGRP, PIM OSPF, OSPFv3, EIGRPv6, BGPv4, ISISv4</li> <li>• VRF-lite • PIM-SM/DM, PIM sparse-dense mode, SSM • Flexible Netflow</li> </ul> |
| Advanced Network security      | <ul style="list-style-type: none"> <li>• Port security • DHCP snooping • Dynamic ARP inspection (DAI) • IP source guard • The Unicast Reverse Path Forwarding (uRPF)</li> <li>• Bidirectional data support on a SPAN • User authentication</li> <li>• Private VLAN • Router and VLAN ACLs • complete identity and security</li> <li>• Multidomain authentication • MAC address notification</li> <li>• IGMP filtering • Cisco security VLAN ACL</li> <li>• Secure Shell (SSH) Protocol, Kerberos, and Simple Network Management Protocol Version 3 (SNMPv3)</li> <li>• Port-based ACLs • TrustSec SXP • IEEE 802.1ae</li> <li>• TACACS+ and RADIUS authentication • Cisco standard and extended IP security router ACLs</li> <li>• Bridge protocol data unit (BPDU) Guard</li> <li>• Spanning Tree Root Guard (STRG) • Wireless end-to-end security</li> </ul>   |
| Technical Support and Services | <ul style="list-style-type: none"> <li>• Cisco SMARTnet Service • Cisco Smart Foundation Service</li> <li>• Cisco SP Base Service • Cisco Focused Technical Support Services</li> </ul>  |



# WS-C3650-48PQ-S Datasheet



**HI-NETWORK.com**  
Your Global Original Network Supplier

Get a Quote

|  |                                 |
|--|---------------------------------|
| Operating temperature up to 5000 ft (1500 m)             | 23°F to 113°F (-5°C to +45°C)   |
| Operating temperature up to 10,000 ft (3000 m)           | 23°F to 104°F (-5°C to +40°C)   |
| Short-term exception at sealevel with single fan failure | 23°F to 113°F (-5°C to +45°C)   |
| Short-term exception up to 5000 feet (1500 m)            | 23°F to 122°F (-5°C to 50°C)    |
| Short-term exception up to 10,000 feet (3000 m)          | 23°F to 113°F (-5°C to 45°C)    |
| Operating temperature up to 6000 ft (1800 m)             | 23°F to 113°F (-5°C to +45°C)   |
| Operating temperature up to 10,000 ft (3000 m)           | 23°F to 104°F (-5°C to +40°C)   |
| Operating temperature up to 13,000 ft (4000m)            | 23°F to 95°F (-5°C to 35°C)     |
| Short-term exception up to 6,000 feet (1800 m)           | 23°F to 131°F (-5°C to +55°C)   |
| Short-term exception up to 10,000 feet (3000 m)          | 23°F to 122°F (-5°C to +50°C)   |
| Short-term exception up to 13,000 feet (4000 m)          | 23°F to 113°F (-5°C to +45°C)   |
| Short-term exception at sealevel with single fan failure | 23°F to 113°F (-5°C to +45°)    |
| Storage environment                                      | -40°F to 160°F (-40°C to 70°C)  |
| Operating altitude                                       | Up to 16,400 Feet (Up to 5000m) |
| Storage altitude   | Up to 16,400 Feet (Up to 5000m) |
| Operating relative humidity                              | 5% to 96% noncondensing         |
| Storage relative humidity 5                              | 5% to 96% noncondensing         |



Get a Quote

## Want to Buy

---

Get a Quote



[Learn More](#) about Hi-Network



[Search](#) our Resource Library



[Follow](#) us on LinkedIn



Contact for [Sales or Support](#)

## Contact HI-NETWORK.COM For Global Fast Shipping

---

HongKong Office Tel: +00852-66181601

HangZhou Office Tel: +0086-571-86729517

Email: [info@hi-network.com](mailto:info@hi-network.com)

Skype: echo.hinetwork

WhatsApp Business: +8618057156223