

## Overview

Cisco Catalyst 3850-48P-S switch is the next generation stackable enterprise level switch and integrated with 48 Ethernet POE + ports with IP Base IOS image.


## Quick Specification

Product Code	WS-C3850-48P-S
Enclosure Type	1RU
Feature Set	IP Base
Network SFP uplink module selection	435W
Ports	C3850-NM-4-1G 、 C3850-NM-2-10G 、 C3850-NM-4-10G
Available POE Power	48 x 10/100/1000 (POE+)
Maximum stacking number	9
Stack bandwidth	480 Gpbs
Switching Capacity	130.95 Mpps
Forwarding Performance	176 Gbps
RAM	4 G
Flash Memory	2G
Number of AP per switch/stack	100
Number of wireless clients per switch/stack	2000
Dimensions	44.5 cm x 44.5 cm x 4.45 cm
Package Weight	17.49 Kg

Get a Quote

## Product Details:

### The Front Panel:

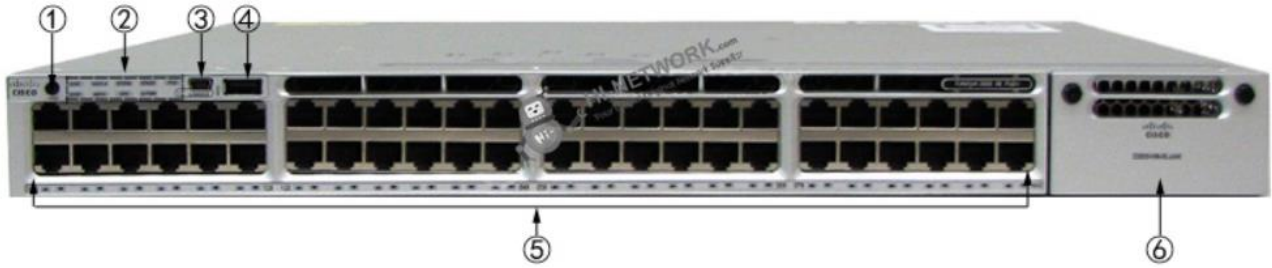


①	Mode button
②	Status LEDs
③	USB mini-Type B (console) port
④	USB Type A storage port
⑤	48 * 10/100/1000 Ethernet ports
⑥	Network SFP uplink module slot

·The status LEDs include STAT (status), DUPLX (duplex), SPEED, STACK, SYST (system), PoE, ACTV (active) and S-PWR (Stack Power).

·The switch supports one hot-swappable network module that provides uplink ports to connect to other devices. The switch should only be operated with either a network module or a blank module installed.

### The Other Panel:

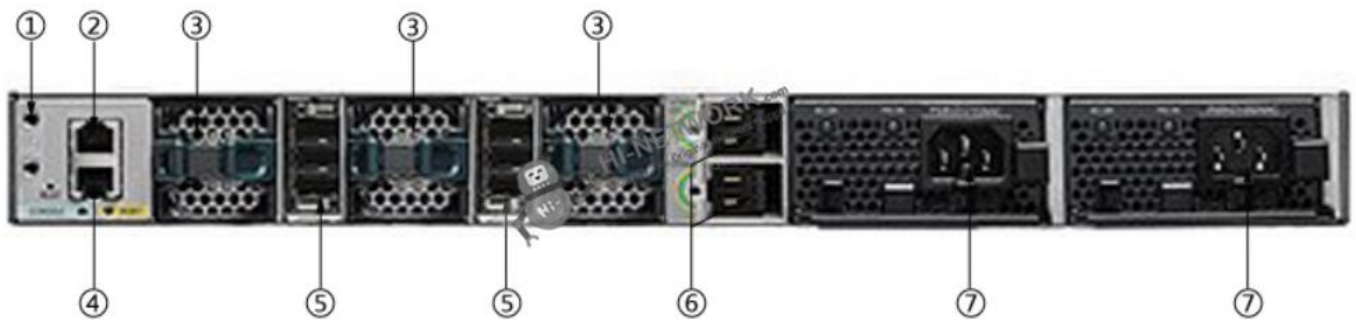

①	Ground connector
---	------------------



Get a Quote

②	CONSOLE (RJ-45 console port)
③	Fan module
④	MGMT port
⑤	StackWise port connectors
⑥	StackPower connectors
⑦	Power supply modules

## Accessories For WS-C3850:

### Modules and Cables:

Part number	Description
<a href="#">C3850-NM-4-1G</a>	Cisco 3850 Series 4 x 1GE Network Module
<a href="#">C3850-NM-2-10G</a>	Cisco 3850 Series 2 x 10GE Network Module
<a href="#">C3850-NM-4-10G</a>	Cisco 3850 Series 4 x 10GE Network Module
L-C3850-48-S-E=	C3850-48 IP Base to IP Services Electronic RTU License
PWR-C1-715WAC	Cisco 3850 Series Power Supply 715W AC
PWR-C1-715WAC/2	Cisco 3850 Series Secondary Power Supply 715W AC Config 1 Secondary Power Supply
CAB-SPWR-30CM	Catalyst 3750X and 3850 Stack Power Cable 30 CM
CAB-SPWR-150CM	Catalyst 3750X and 3850 Stack Power Cable 150 CM
STACK-T1-50CM=	Cisco StackWise-480 50cm stacking cable for Cisco Catalyst 3850 series switch
<a href="#">STACK-T1-1M=</a>	Cisco StackWise-480 1m stacking cable for Cisco Catalyst 3850 series switch

### Compare to Similar Items

Models	<a href="#">WS-C3850-48P-S</a>	WS-C3850-48T-S
Feature Set	IP Base	IP Base
Network SFP uplink module selection	C3850-NM-4-1G C3850-NM-2-10G C3850-NM-4-10G	C3850-NM-4-1G C3850-NM-2-10G C3850-NM-4-10G
Ports	48 * 10/100/1000 Ethernet ports	48 * 10/100/1000 Ethernet ports
Available PoE Power	435 W	N/A

Get more information:





Get a Quote

Do you have any question about WS-C3850-48P-S?

Contact us now via e-mail: [info@hi-network.com](mailto:info@hi-network.com)

## Specific Data Sheet:

Model	WS-C3850-48P-S
Enclosure type	Rack-mountable – 1U
Ports	48 x 10/100/1000 (POE+)
Network management Interface	Ethernet management port: RJ-45 connectors, 4-pair Cat-5 UTP cabling Management console port: RJ-45-to-DB9 cable for PC connections
Available PoE Power	435W
Switching Capacity	176 Gbps
Maximum stacking number	up to 9 switches with same IOS feature set in same series
Stack Bandwidth	480 Gbps
Forwarding Performance	130.95Mpps
FNF entries	48,000 flows
Maximum VLANs IDs	1000
Maximum VLANs IDs	32K
CPU	Multicore CPU
RAM	4 G
Flash Memory	2 G
Number of AP per switch/stack	100
Number of wireless clients per switch/stack	2000
Total number of WLANs per switch	64
Wireless bandwidth per switch	up to 40 Gbps
Supported Aironet AP series	3600, 3500, 2600, 1600, 1260, 1140, 1040
Console ports	USB (Type-B), Ethernet (RJ-45)
Expansion Slot(s)	1 network module slot and 1 power redundant slot
Network Modules Selection	<ul style="list-style-type: none"> <li>● C3850-NM-4-1G: 4 x 1G uplinks network module</li> <li>● C3850-NM-4-10G: 4 x 10G uplinks network module</li> <li>● C3850-NM-2-10G: 2 x 10G or 4 x 1G uplinks network module</li> </ul>
Stacking cable	<ul style="list-style-type: none"> <li>● STACK-T1-50CM StackWise stacking cable with a 0.5 m length</li> <li>● STACK-T1-1M StackWise stacking cable with a 1.0 m length</li> <li>● STACK-T1-3M StackWise stacking cable with a 3.0 m length</li> </ul>
Stack Power Cable (recommended)	<ul style="list-style-type: none"> <li>● CAB-SPWR-30CM stack power cable with a 30CM length</li> <li>● CAB-SPWR-150CM stack power cable with a 150CM length</li> </ul>
Power supply	PWR-C1-715WAC





Get a Quote

Power Device	Power supply – redundant – plug-in module
Power Redundancy	optional
Voltage range (Auto)	100V-240V
Power Consumption of standalone (in Watts)	135.96 (max)
Width	17.5 Inches (44.5 cm)
Depth	17.7 Inches (44.9 cm)
Height	1.75 Inches (4.45 cm)
Weight	17.4 Pounds (7.9Kg)
Rack Mounting Kit	optional
MTBF in hours	241,050
Compliant Standards	<ul style="list-style-type: none"> <li>● IEEE 802.1D Spanning Tree Protocol</li> <li>● IEEE 802.1p CoS Prioritization</li> <li>● IEEE 802.1Q VLAN</li> <li>● IEEE 802.1s</li> <li>● IEEE 802.1w</li> <li>● IEEE 802.1X</li> <li>● IEEE 802.1X-Rev</li> <li>● IEEE 802.11</li> <li>● IEEE 802.1ab (LLDP)</li> <li>● IEEE 802.3ad</li> <li>● IEEE 802.3x full duplex on 10BASE-T, 100BASE-TX, and 1000BASE-T ports</li> <li>● IEEE 802.3 10BASE-T</li> <li>● IEEE 802.3u 100BASE-TX</li> <li>● IEEE 802.3ab 1000BASE-T</li> <li>● IEEE 802.3z 1000BASE-X</li> <li>● RMON I and II standards</li> <li>● SNMP v1, v2c, and v3</li> <li>● IEEE 802.3af and IEEE 802.3at</li> </ul>
System software	IOS IP Base (Upgradable)
EnergyWise license	ENERGY-MGMT, ENERGY-MGT-100-K9
Software license	<ul style="list-style-type: none"> <li>● C3850-48-S-E: IP Base to IP Services RTU paper license</li> <li>● L-C3850-48-S-E: IP Base to IP Services RTU electronic license</li> </ul>
Access Point Licenses	<ul style="list-style-type: none"> <li>● L-LIC-CT3850-UPG: Primary upgrade license SKU for Cisco 3850 wireless controller (e-delivery)</li> <li>● L-LIC-CTIOS-1A: 1 access point adder license for Cisco IOS Software based wireless controller (e-delivery)</li> <li>● LIC-CT3850-UPG: Primary upgrade license SKU for Cisco 3850 wireless controller (paper license)</li> <li>● LIC-CTIOS-1A: 1 access point adder license for the Cisco IOS Software based wireless controller (paper license)</li> </ul>
Features	<ul style="list-style-type: none"> <li>● RPS Support</li> <li>● IP service-level agreements (SLAs)</li> <li>● Advanced IP unicast routing protocols</li> <li>● Jumbo Frames</li> </ul>





Get a Quote

	<ul style="list-style-type: none"> <li>• VLANs • Voice Vlan • VTPv2 • CDPv2 • LLDP • 802.3ad LACP and PAGP • PVST/PVST+ • 802.1W/802.1S</li> <li>• Port Fast/Uplink Fast • Dynamic Trunking Protocol (DTP) • port CoS Trust and Override • Trusted Boundary</li> <li>• ACL Classification • Ingress Policing • Auto QoS • Per VLAN policies • 802.1p queues • Scheduling • Priority Queuing • Configure CoS Priority Queues • Configure CoS Priority Queues • Configure Queue Weights • Configure Buffers and Thresholds • Class &amp; Policy Maps • Modify CoS and DSCP Mapping • Weighted Tail Drop • IGMPv1,v2,v3 and MLDv1, v2 • DHCP server • DSCP transparency • HSRP, VRRP, BGP • RIPv1, v2 EIGRP, PIM OSPF, OSPFv3, EIGRPv6, BGPv4, IS-ISv4 • VRF-lite • PIM-SM/DM, PIM sparse-dense mode, SSM • Flexible Netflow</li> </ul>
Advanced Network security	<ul style="list-style-type: none"> <li>• Port security • DHCP snooping • Dynamic ARP inspection (DAI) • IP source guard • The Unicast Reverse Path Forwarding (uRPF)</li> <li>• Bidirectional data support on a SPAN • User authentication</li> <li>• Private VLAN • Router and VLAN ACLs • complete identity and security</li> <li>• Multidomain authentication • MAC address notification</li> <li>• IGMP filtering • Cisco security VLAN ACL</li> <li>• Secure Shell (SSH) Protocol, Kerberos, and Simple Network Management Protocol Version 3 (SNMPv3)</li> <li>• Port-based ACLs • TrustSec SXP • IEEE 802.1ae</li> <li>• TACACS+ and RADIUS authentication • Cisco standard and extended IP security router ACLs</li> <li>• Bridge protocol data unit (BPDU) Guard</li> <li>• Spanning Tree Root Guard (STRG) • Wireless end-to-end security</li> </ul>
Technical Support and Services	<ul style="list-style-type: none"> <li>• Cisco SMARTnet Service • Cisco Smart Foundation Service</li> <li>• Cisco SP Base Service • Cisco Focused Technical Support Services</li> </ul>
Operating temperature up to 5000 ft (1500 m)	23°F to 113°F (-5°C to +45°C)
Operating temperature up to 10,000 ft (3000 m)	23°F to 104°F (-5°C to +40°C)
Short-term exception at sealevel with single fan failure	23°F to 113°F (-5°C to +45°C)
Short-term exception up to 5000 feet (1500 m)	23°F to 122°F (-5°C to 50°C)
Short-term exception up to 10,000 feet (3000 m)	23°F to 113°F (-5°C to 45°C)
Operating temperature up to 6000 ft (1800 m)	23°F to 113°F (-5°C to +45°C)
Operating temperature up to 10,000 ft (3000 m)	23°F to 104°F (-5°C to +40°C)
Operating temperature up to 13,000 ft (4000m)	23°F to 95°F (-5°C to 35°C)
Short-term exception up to 6,000 feet (1800 m)	23°F to 131°F (-5°C to +55°C)
Short-term exception up to 10,000 feet (3000 m)	23°F to 122°F (-5°C to +50°C)
Short-term exception up to 13,000 feet (4000 m)	23°F to 113°F (-5°C to +45°C)
Short-term exception at sealevel with single fan failure	23°F to 113°F (-5°C to +45°)
Storage environment	-40°F to 160°F (-40°C to 70°C)
Operating altitude	Up to 13,000 Feet (Up to 4000m)





[Get a Quote](#)

Storage altitude	Up to 15,000 Feet (Up to 4573m)
Operating relative humidity	10% to 95% noncondensing
Storage relative humidity 5	10% to 95% noncondensing

## Want to Buy

[Get a Quote](#)



[Learn More](#) about Hi-Network



[Search](#) our Resource Library



[Follow](#) us on LinkedIn



Contact for [Sales or Support](#)

## Contact HI-NETWORK.COM For Global Fast Shipping

HongKong Office Tel: +00852-66181601

HangZhou Office Tel: +0086-571-86729517

Email: [info@hi-network.com](mailto:info@hi-network.com)

Skype: [echo.hinetwork](https://www.skype.com/people/echo.hinetwork)

WhatsApp Business: +8618057156223

