

[Get a Quote](#)

## Overview

AR157W(ADSL2+ ANNEX A/M WAN,4FE LAN,802.11b/g/n AP,1 USB)

## Quick Specification

Model	AR157W
Part Number	02354247
Memory	512 MB
Flash	512 MB
Service interfaces (standard configuration)	WAN interface: one ADSL-A/M interface LAN interfaces: four FE electrical interfaces, in which FE0 LAN interface can be switched to a WAN interface, and two Wi-Fi antenna interfaces.
Extended slots	Not supported
Weight	2.8 kg (6.17 lb)
Dimensions (W x D x H)	Without rack-mounting bracket installed: 44.0 mm x 300.0 mm x 216.4 mm (1.73 in. x 11.81 in. x 8.52 in.) With rack-mounting brackets installed: 44.0 mm x 482.6 mm x 216.4 mm (1.73 in. x 19.00 in. x 8.52 in.)


## Product Details:

### The Front Panel:



①	USB interface (host)
②	Two Wi-Fi antennas

### The Back Panel:

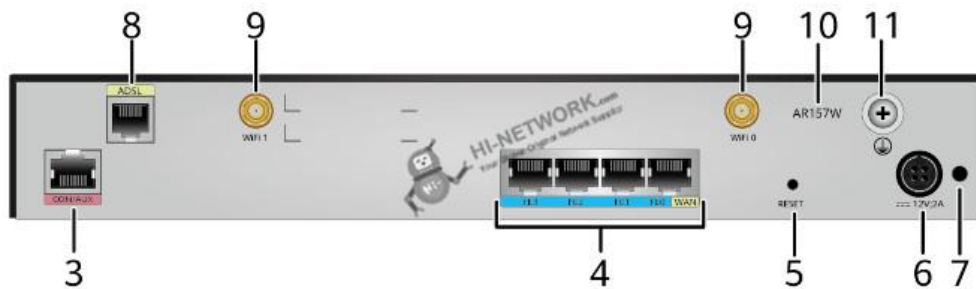

③	CON/AUX interface
④	WAN interface: FE electrical interface
⑤	RESET button
⑥	PoE power jack
⑦	Jack for power cable locking strap
⑧	WAN interface: ADSL-A/M interface
⑨	Two Wi-Fi antenna interfaces
⑩	Product model silkscreen
⑪	Ground point



## The Accessories for AR157W

### Compare to Similar Items

Model	<a href="#">AR157W</a>	AR2220E
SIC Slots	0	4
Memory	512 MB	1 GB
Flash	512 MB	512 MB
Weight	2.8 kg (6.17 lb)	6 kg (13.2 lb)
Dimensions (W x D x H)	300.0 mm x 216.4 mm x 44.0 mm	442.0 mm x 420.0 mm x 44.5 mm

Get more information:

Do you have any question about the AR157W 02354247?

Contact us now via e-mail: [info@hi-network.com](mailto:info@hi-network.com)

## Specific Data Sheet:

Part Number	02354247
Model	AR157W
First Supported Version	V200R003C00
Memory	512 MB
Flash	512 MB
Service interfaces (standard configuration)	<p>WAN interface: one ADSL-A/M interface</p> <p>LAN interfaces: four FE electrical interfaces, in which FE0 LAN interface can be switched to a WAN interface, and two Wi-Fi antenna interfaces.</p>
Extended slots	Not supported
Weight	2.8 kg (6.17 lb)
Dimensions (W x D x H)	<p>Without rack-mounting bracket installed: 44.0 mm x 300.0 mm x 216.4 mm (1.73 in. x 11.81 in. x 8.52 in.)</p> <p>With rack-mounting brackets installed: 44.0 mm x 482.6 mm x 216.4 mm (1.73 in. x 19.00 in. x 8.52 in.)</p>
Processor	Dual-core, 533 MHz
Micro SD card (sd1 by default)	None
Hard disk	Not supported
Rated input voltage range (AC)	100 V to 240 V, 50 Hz/60 Hz



## Datasheet

Maximum input voltage range (AC)	90 V AC to 264 V AC, 47 Hz to 63 Hz
Maximum output current	2 A
Maximum output power	24 W
RPS	Not supported
PoE	Not supported
Rated input voltage range (AC)	100 V to 240 V, 50 Hz/60 Hz
Maximum input voltage range (AC)	90 V AC to 264 V AC, 47 Hz to 63 Hz
Maximum power consumption	16.7 W
Fan	None
Airflow (facing the front panel)	None
Management interfaces	1 (RJ45)
CON/AUX interfaces	1 (RJ45)
USB 2.0	1
Service interfaces (standard configuration)	<p>WAN interface: one ADSL-A/M interface</p> <p>LAN interfaces: four FE electrical interfaces, in which FE0 LAN interface can be switched to a WAN interface, and two Wi-Fi antenna interfaces.</p>
Extended slots	Not supported
Operating temperature	0°C to 45°C (32°F to 113°F)
Storage temperature	-40°C to +70°C
Operating relative humidity	5% to 95%, noncondensing
Operating altitude	< 5000 m (16404.2 ft.)

## Want to Buy

[Get a Quote](#)

[Learn More](#) about Hi-Network

[Search](#) our Resource Library

[Follow](#) us on LinkedIn

 Contact for [Sales or Support](#)

AR157W (02354247)

Datasheet



**Contact HI-NETWORK.COM For Global Fast Shipping**

---

HongKong Office Tel: +00852-66181601

HangZhou Office Tel: +0086-571-86729517

Email: [info@hi-network.com](mailto:info@hi-network.com)

Skype: echo.hinetwork

WhatsApp Business: +8618057156223

