

[Get a Quote](#)

## Overview

Huawei AR G3 AR200 Series router AR201 fixed interface access enterprise router AR0M0001BA00 provides routing and switching functionality for small business or branch offices. Huawei AR G3 AR0M0001BA00 equips 1 Fast Ethernet 10/100 WAN port, 8 Fast Ethernet 10/100 LAN ports, 1 USB and provides total 150Mbps system capacity. Dual-core processor separate data and control planes to ensure the high performance. Robust security feature include build-in, comprehensive authentication, defense mechanisms and a broad range of VPN options.

## Quick Specification

Model	AR201
Part Number	02353839
Memory	512 MB
Flash	512 MB
Service interfaces (standard configuration)	WAN interface: one FE electrical interface LAN interfaces: eight FE electrical interfaces, in which LAN interface FE0 can be used as a WAN interface
Extended slots	Not supported
Weight	2.8 kg
Dimensions (W x D x H)	With no mounting bracket installed: 44.0 mm x 300.0 mm x 216.4 mm (1.73 in. x 11.81 in. x 8.52 in.) With mounting brackets installed: 44.0 mm x 482.6 mm x 216.4 mm (1.73 in. x 19.00 in. x 8.52 in.)


## Product Details:

### The Front Panel:



①	USB interface (host)
---	----------------------

### The Back Panel:

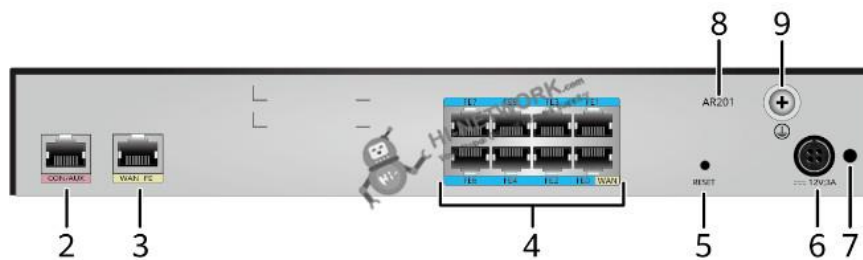

②	USB interface (host)
③	CON/AUX interface
④	WAN interface: FE electrical interface
⑤	LAN interfaces: eight FE electrical interfaces
⑥	RESET button
⑦	Power jack
⑧	Jack for power cable locking strap
⑨	Product model silkscreen
⑩	Ground point

## Datasheet

### The Accessories for AR201

#### Compare to Similar Items

Model	<a href="#">AR201</a>	AR2220E
SIC Slots	0	4
Memory	512 MB	1 GB
Flash	512 MB	512 MB
Weight	2.8 kg (6.17 lb)	6 kg (13.2 lb)
Dimensions (W x D x H)	300.0 mm x 216.4 mm x 44.0 mm	442.0 mm x 420.0 mm x 44.5 mm

Get more information:

Do you have any question about the AR201 02353839?

Contact us now via e-mail: [info@hi-network.com](mailto:info@hi-network.com)

### Specific Data Sheet:

Part Number	02353839
Model	AR201
First Supported Version	V200R002C00
Processor	Dual-core, 533 MHz
Memory	512 MB
Flash	512 MB
Micro SD card (default: sd1)	None
Hard disk	Not supported
Dimensions (H x W x D)	With no mounting bracket installed: 44.0 mm x 300.0 mm x 216.4 mm (1.73 in. x 11.81 in. x 8.52 in.) With mounting brackets installed: 44.0 mm x 482.6 mm x 216.4 mm (1.73 in. x 19.00 in. x 8.52 in.)
Weight	2.8 kg
Rated input voltage range (AC)	100 V to 240 V, 50 Hz/60 Hz
Maximum input voltage range (AC)	90 V AC to 264 V AC, 47 Hz to 63 Hz
Maximum output current	3 A
Maximum output power	36 W
RPS power supply	Not supported
PoE power supply	Not supported



## Datasheet

Maximum power consumption	12.3 W
Fan module	None
Airflow (facing the front panel)	None
Management interfaces	1 (RJ45)
CON/AUX interfaces	1 (RJ45)
USB 2.0 interfaces	1
Service interfaces (standard configuration)	WAN interface: one FE electrical interface LAN interfaces: eight FE electrical interfaces, in which LAN interface FE0 can be used as a WAN interface
Extended slots	Not supported
Operating temperature	0° C to 45° C (32° F to 113° F)
Storage temperature	-40° C to +70° C (-40° F to +158° F)
Operating relative humidity	5% to 95%, noncondensing
Operating altitude	< 5000 m (16404.2 ft.)

## Want to Buy

[Get a Quote](#)

[Learn More](#) about Hi-Network

[Search](#) our Resource Library

[Follow](#) us on LinkedIn

 Contact for [Sales or Support](#)

## Contact HI-NETWORK.COM For Global Fast Shipping

HongKong Office Tel: +00852-66181601

HangZhou Office Tel: +0086-571-86729517

 Email: [info@hi-network.com](mailto:info@hi-network.com)

Skype: echo.hinetwork

WhatsApp Business: +8618057156223

