

[Get a Quote](#)

Overview

Huawei AR G3 AR200 Series router AR207G-HSPA+7 fixed interface access 3G router AR0M2074BA provides routing and switching functionality for small business or branch offices.

Quick Specification

Model	AR207G-HSPA+7
Part Number	02354074
Memory	512 MB
Flash	512 MB
Service interfaces	WAN interfaces: one ADSL-A/M interface and two 3G-HSPA+7 antenna interfaces LAN interfaces: eight FE electrical interfaces, in which LAN interface FE0 can be used as a WAN interface
Micro SD card (default: sd1)	None
Hard disk	Not supported
Weight(kg)	2.8 kg (6.17 lb)
Dimensions (W x D x H)	With no mounting bracket installed: 44.0 mm x 300.0 mm x 216.4 mm (1.73 in. x 11.81 in. x 8.52 in.) With mounting brackets installed: 44.0 mm x 482.6 mm x 216.4 mm (1.73 in. x 19.00 in. x 8.52 in.)




Product Details:

The Front Panel:



①	USB interface (host)
②	Two 3G antennas

The Back Panel:

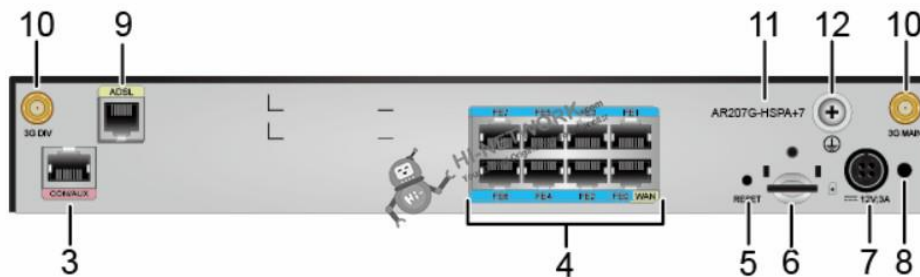

③	CON/AUX interface
④	WAN interface: ADSL-A/M interface
⑤	RST button
⑥	SIM card slot
⑦	Power jack
⑧	Jack for power cable locking strap
⑨	WAN interface: ADSL-A/M interface
⑩	3G-HSPA+7 antenna interface
11	Product model silkscreen

Datasheet

12	Ground point
----	--------------

Compare to Similar Items

Model	AR207G-HSPA+7	AR2220E
SIC Slots	0	4
Memory	512 MB	1 GB
Flash	512 MB	512 MB
Weight	2.8 kg (6.17 lb)	6 kg (13.2 lb)
Dimensions (W x D x H)	300.0 mm x 216.4 mm x 44.0 mm	442.0 mm x 420.0 mm x 44.5 mm

Get more information:

Do you have any question about the AR207G-HSPA+7 02354074?

Contact us now via e-mail: info@hi-network.com

Specific Data Sheet:

Part Number	02354074
Model	AR207G-HSPA+7
First Supported Version	V200R002C01
Memory Size	512 MB
Flash Memory	512 MB
Processor	Dual-core, 533 MHz
Micro SD card (default: sd1)	None
Hard disk	Not supported
Dimensions (W x D x H)	With no mounting bracket installed: 44.0 mm x 300.0 mm x 216.4 mm (1.73 in. x 11.81 in. x 8.52 in.) With mounting brackets installed: 44.0 mm x 482.6 mm x 216.4 mm (1.73 in. x 19.00 in. x 8.52 in.)
Weight	2.8 kg (6.17 lb)
Rated input voltage range (AC)	100 V to 240 V, 50 Hz/60 Hz
Maximum input voltage range (AC)	90 V AC to 264 V AC, 47 Hz to 63 Hz
Maximum output current	3 A
Maximum output power	36 W
RPS power supply	Not supported
PoE power supply	Not supported
Maximum power consumption	17.1 W
Fan module	Built-in, unpluggable fans
Airflow (facing the front panel)	Left-to-right

Datasheet

Management interfaces	1 (RJ45)
CON/AUX interfaces	1 (RJ45)
USB 2.0 interfaces	1
Service interfaces	<p>WAN interfaces: one ADSL-A/M interface and two 3G-HSPA+7 antenna interfaces</p> <p>LAN interfaces: eight FE electrical interfaces, in which LAN interface FE0 can be used as a WAN interface</p>
Extended slots	Not supported
Operating temperature	0° C to 45° C (32° F to 113° F)
Storage temperature	-40° C to +70° C (-40° F to +158° F)
Operating relative humidity	5% to 95%, noncondensing
Operating altitude	< 5000 m (16404.2 ft.)

Want to Buy

[Get a Quote](#)

[Learn More](#) about Hi-Network

[Search](#) our Resource Library

[Follow](#) us on LinkedIn

 Contact for [Sales or Support](#)

Contact HI-NETWORK.COM For Global Fast Shipping

HongKong Office Tel: +00852-66181601

HangZhou Office Tel: +0086-571-86729517

 Email: info@hi-network.com

 Skype: [echo.hinetwork](https://www.skype.com/addtocontactlist/echo.hinetwork)

WhatsApp Business: +8618057156223