

[Get a Quote](#)

## Overview

CE6850-EI-B-B0A is CE6850-48S4Q-EI Switch (2\*350W AC Power Module, 2\*FAN Box, Port-side Intake).

## Quick Specification

Table 1 shows the Quick Specification.


Model	CE6850-EI-B-B0A
Part Number	02350EXQ
Description	2*350W AC Power Module, 2*FAN Box, Port-side Intake
10G Base-T Ports	0
SFP+ Ports	48
FC Ports	0
QSFP+ Ports	4
Switching Capacity	1.28 Tbit/s
Forwarding Rate	960 Mpps
Airflow Design	Front-to-back or back-to-front
Power Supply	350WAC
Maximum power consumption	272 W
Typical power consumption	180 W
Dimensions (W x D x H)	442 mm x 600 mm x 43.6 mm
Weight (fully loaded)	11 kg (24.2 lb)

Figure 1 shows the appearance of CE6850-EI-B-B0A.



## Product Details


Figure 2 shows the front (port side) panel of CE6850-EI-B-B0A.

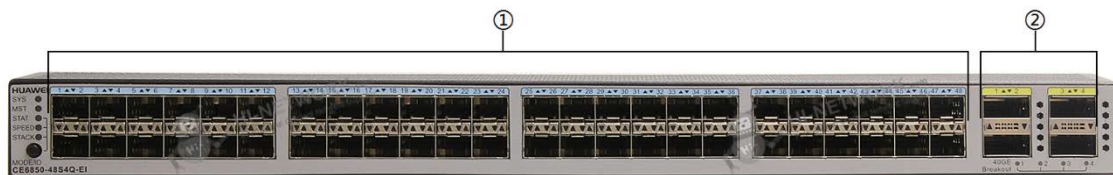

Note:

(1)	Forty-eight 10GE SFP+ Ethernet optical ports	1
(2)	Four 40GE QSFP+ Ethernet optical ports	4

Figure 3 shows the rear (power supply side) panel of CE6850-EI-B-B0A.

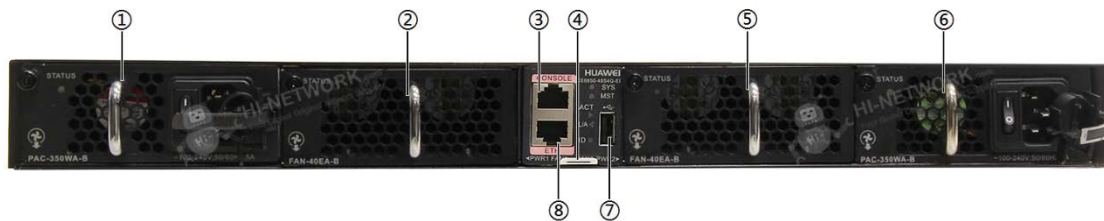

Note:

(1)	Power supply slot 1	(5)	Fan slot 2
(2)	Fan slot 1	(6)	Power supply slot 2
(3)	Console port	(7)	USB port
(4)	Bar code label	(8)	ETH management port

## The Modules

Table 2 shows the recommended elements for the CE6850-EI-B-B0A.

Model	Description
AC power module	
PAC-350WA-F	350W AC Power Module (Front to Back, Power panel side intake)
PAC-350WA-B	350W AC Power Module (Back to Front, Power panel side exhaust)
GE-SFP Optical Transceiver	
<a href="#">eSFP-GE-SX-MM850</a>	Optical Transceiver, eSFP, GE, Multi-mode Module (850nm, 0.55km, LC)
<a href="#">SFP-GE-LX-SM1310</a>	Optical Transceiver, eSFP, GE, Single-mode Module (1310nm, 10km, LC)
<a href="#">S-SFP-GE-LH40-SM1310</a>	Optical Transceiver, eSFP, GE, Single-mode Module (1310nm, 40km, LC)
<a href="#">S-SFP-GE-LH40-SM1550</a>	Optical Transceiver, eSFP, GE, Single-mode Module (1550nm, 40km, LC)
10G-SFP+ Optical Transceiver	
<a href="#">SFP-10G-USR</a>	10GBase-USR Optical Transceiver, SFP+, 10G, Multi-mode Module (850nm, 0.1km, LC)
<a href="#">OMXD30000</a>	Optical Transceiver, SFP+, 10G, Multi-mode Module (850nm, 0.3km, LC)
40GE QSFP+ optical transceiver	
QSFP-40G-iSR4	40GBase-iSR4 Optical Transceiver, QSFP+,40G, Multi-mode (850nm,0.15km, MPO) (Connect to four SFP+ Optical Transceiver)
<a href="#">QSFP-40G-LR4</a>	40GBase-LR4 Optical Transceiver, QSFP+,40GE, Single-mode Module (1310nm, 10km, LC)
GE Copper Transceiver	
<a href="#">SFP-1000BaseT</a>	Electrical Transceiver, SFP, GE, Electrical Interface Module (100m, RJ45)
FAN-40EA	
FAN-40EA-F	Fan box (EA, Front to Back, FAN panel side intake)
FAN-40EA-B	Fan box (EA, Back to Front, FAN panel side exhaust)

## Compare to Similar Items

Table 3 shows the comparison of CE6850-EI-B-B0A and CE6850-EI-B-B00.

Model	CE6850-EI-B-B0A	CE6850-EI-B-B00
10G Base-T Ports	0	48
SFP+ Ports	48	0
FC Ports	0	0
QSFP+ Ports	4	4
Switching Capacity	1.28 Tbit/s	1.28 Tbit/s

Forwarding Rate	960 Mpps	960 Mpps
Airflow Design	Front-to-back or back-to-front	Front-to-back or back-to-front
Power Supply	350WDC, 350WAC	350W AC, 600W AC
Maximum power consumption	272 W	380 W
Typical power consumption	180 W	305 W

## Get More Information

Do you have any question about the CE6850-EI-B-B0A (02350EXQ)?

Contact us now via [info@hi-network.com](mailto:info@hi-network.com).

## Specification

CE6850-EI-B-B0A Specifications	
Model	CE6850-EI-B-B0A
Part Number	02350EXQ
Description	2*350W AC Power Module, 2*FAN Box, Port-side Intake
10G Base-T Ports	0
SFP+ Ports	48
FC Ports	0
QSFP+ Ports	4
Switching Capacity	1.28 Tbit/s
Forwarding Rate	960 Mpps
Airflow Design	Front-to-back or back-to-front
Device Virtualization	iStack Super Virtual Fabric (SVF)
Network Virtualization	M-LAG TRILL BGP-EVPN (CE6800HI)
VM Awareness	Agile Controller
Network Convergence	FCoE DCBX, PFC, and ETS
Programmability	OpenFlow OPS Puppet, and OVSDB plugins released on open-source websites Linux container for open source and customization programming
Traffic Analysis	NetStream

	sFlow
VLAN	<ul style="list-style-type: none"> <li>Adding access, trunk, and hybrid interfaces to VLANs</li> <li>Default VLAN</li> <li>QinQ</li> <li>MUX VLAN</li> <li>GVRP</li> </ul>
ACL	Ingress: 2,250 Egress: 1,000
MAC Address Table	<ul style="list-style-type: none"> <li>Maximum: 128k</li> <li>Dynamic learning and aging of MAC addresses</li> <li>Static, dynamic, and blackhole MAC address entries</li> <li>Packet filtering based on source MAC addresses</li> <li>MAC address limiting based on ports and VLANs</li> </ul>
ARP (maximum)	16k
IPv4 FIB (maximum)	16k
IP Routing	<ul style="list-style-type: none"> <li>IPv4 routing protocols, such as RIP, OSPF, BGP, and IS-IS</li> <li>IPv6 routing protocols, such as RIPng, OSPFv3, IS-ISv6, and BGP4+</li> </ul>
IPv6 FIB (maximum)	8k
IPv6	<ul style="list-style-type: none"> <li>IPv6 Neighbor Discovery (ND)</li> <li>Path MTU Discovery (PMTU)</li> <li>TCP6, ping IPv6, tracer IPv6, socket IPv6, UDP6, and Raw IP6</li> </ul>
Multicast FIB (maximum)	4k
Multicast	<ul style="list-style-type: none"> <li>IGMP, PIM-SM, PIM-DM, MSDP, and MBGP</li> <li>IGMP snooping</li> <li>IGMP proxy</li> <li>Fast leave of multicast member interfaces</li> <li>Multicast traffic suppression</li> <li>Multicast VLAN</li> </ul>
MPLS	MPLS (CE6800HI)
Reliability	<ul style="list-style-type: none"> <li>LACP</li> <li>STP, RSTP, VBST, and MSTP</li> <li>BPDU protection, root protection, and loop protection</li> <li>Smart Link and multi-instance</li> <li>DLDP</li> <li>ERPS (G.8032)</li> <li>VRRP, VRRP load balancing, and BFD for VRRP</li> <li>BFD for BGP/IS-IS/OSPF/Static route</li> </ul>
QoS	<ul style="list-style-type: none"> <li>Traffic classification based on Layer 2 headers, Layer 3 protocols, Layer 4 protocols, and 802.1p priority</li> <li>Actions of ACL, CAR, re-marking, and scheduling</li> <li>Queue scheduling algorithms, including PQ, WRR, DRR, PQ + WRR, and PQ + DRR</li> <li>Congestion avoidance mechanisms, including WRED and tail drop</li> <li>Traffic shaping</li> </ul>
Configuration and Maintenance	<ul style="list-style-type: none"> <li>Console, Telnet, and SSH terminals</li> <li>Network management protocols, such as SNMPv1/v2c/v3</li> <li>File upload and download through FTP and TFTP</li> </ul>

	BootROM upgrade and remote upgrade 802.3az Energy Efficient Ethernet (EEE) Hot patches User operation logs ZTP
Security and Management	802.1x authentication Command line authority control based on user levels, preventing unauthorized users from using commands DoS, ARP, and ICMP attack defenses Port isolation, port security, and sticky MAC Binding of the IP address, MAC address, interface number, and VLAN ID Authentication methods, including AAA, RADIUS, and HWTACACS Remote Network Monitoring (RMON)
Dimensions (W x D x H)	442 mm x 600 mm x 43.6 mm
Weight (fully loaded)	11 kg (24.2 lb)
Environmental Parameters	Operating temperature: 0°C to 40°C (32°F to 104°F) (0m to 1,800m) Storage temperature: -40°C to 70°C (-40°F to 158°F) Relative humidity: 5% RH to 95% RH, non-condensing
Operating Voltage	AC: 90V to 290V DC: -38.4V to -72V
Max. Power Consumption	272W

## Want to Buy

[Get a Quote](#)

[Learn More](#) about Hi-Network

[Search](#) our Resource Library

[Follow](#) us on LinkedIn

 Contact for [Sales or Support](#)

## Contact HI-NETWORK.COM For Global Fast Shipping

HongKong Office Tel: +00852-66181601

HangZhou Office Tel: +0086-571-86729517

 Email: [info@hi-network.com](mailto:info@hi-network.com)

Skype: echo.hinetwork

WhatsApp Business: +8618057156223

