

Get a Quote

Overview


The ES1D2G48SX5S provides high performance, large entry sizes, and a large buffer for data switching. This card is highly integrated and has a large port density. The ES1D2G48SX5S can be installed in: Slots 01 to 03 in an S7703 or S7703 PoE chassis, Slots 01 to 06 in an S7706 or S7706 PoE chassis or Slots 01 to 12 in an S7712 chassis.

Quick Specification

Table 1 shows the quick specification.


Description	ES1D2G48SX5S
Part Number	03032WSR
Model	48-port 100/1000BASE-X Interface Card (X5S, SFP)
Dimensions without packaging (H x W x D) [mm(in.)]	35.1 mm x 397.2 mm x 430.4 mm (1.38 in. x 15.64 in. x 16.95 in.)
Weight without packaging [kg(lb)]	3.1
Maximum power consumption [W]	110
Basic functions	Provides forty-eight GE optical ports for data access and switching.
Distributed forwarding	Performs concurrent data forwarding using a distributed data plane.
Hot swapping	The ES1D2G48SX5S is hot swappable.

Figure 1 shows the appearance of ES1D2G48SX5S.

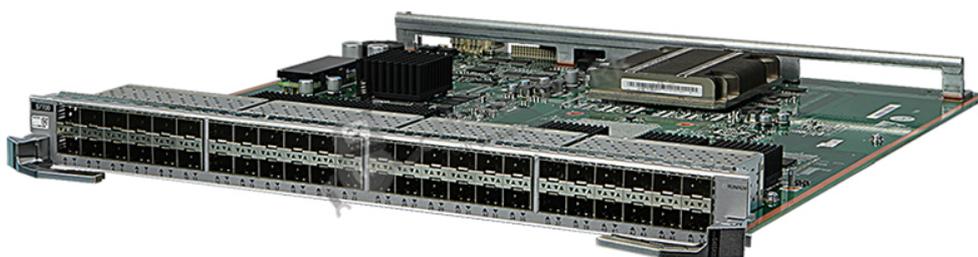

Product Details

Figure 2 show the indicators on the ES1D2G48SX5S panel.

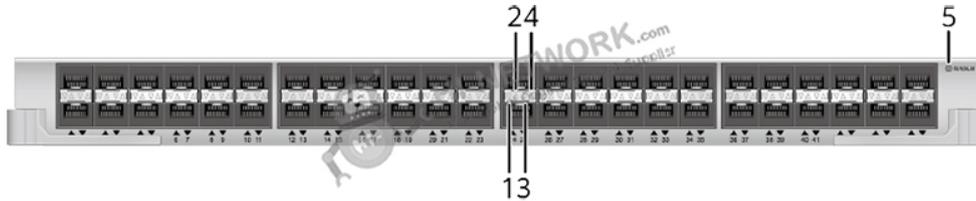

Note:

Number	Indicator	Color	Description
(1)	ACT indicator of a lower optical port	Yellow	Blinking: The port is transmitting and receiving data.
(2)	ACT indicator of an upper optical port		
(3)	LINK indicator of a lower optical port	Green	Steady on: A link has been established on the port.
(4)	LINK indicator of an upper optical port		
(5)	RUN/ALM: running status indicator	Green	Steady on: The card is powered on. If the indicator is steady green for no more than 30 seconds, the CPU is being started. If the indicator is steady green for more than 30 seconds, the software is not running. Slow blinking: The card software is running properly. Fast blinking: The card software is starting.
		Red	Steady on: The card has failed and the fault requires manual intervention.
		Yellow	Steady on: The card is powered off. (For example, the card has been forcibly powered off using the power off command or is about to start.)

Figure 3 show the ports on the ES1D2G48SX5S panel.



Note:

(1)	Forty-eight 100/1000BASE-X ports
-----	----------------------------------

Get more information

Do you have any question about the ES1D2G48SX5S (03032WSR)?

Contact us now via info@hi-network.com.

Specification

ES1D2G48SX5S Specification	
Basic Information	
Model	ES1D2G48SX5S
Part Number	03032WSR
Description	48-port 100/1000BASE-X Interface Card (X5S, SFP)
Level-1 category	Interface card
Technical Specifications	
Dimensions without packaging (H x W x D) [mm(in.)]	35.1 mm x 397.2 mm x 430.4 mm (1.38 in. x 15.64 in. x 16.95 in.)
Weight without packaging [kg(lb)]	3.1
Typical power consumption [W]	105
Typical heat dissipation [BTU/hour]	358.27
Maximum power consumption [W]	110
Maximum heat dissipation [BTU/hour]	375.33
Memory	1 GB

Want to Buy

Get a Quote



[Learn More](#) about Hi-Network



[Search](#) our Resource Library



[Follow](#) us on LinkedIn



Contact for [Sales or Support](#)

ES1D2G48SX5S (03032WSR)

Datasheet



Contact HI-NETWORK.COM For Global Fast Shipping

HongKong Office Tel: +00852-66181601

HangZhou Office Tel: +0086-571-86729517

Email: info@hi-network.com

Skype: echo.hinetwork

WhatsApp Business: +8618057156223