

## Overview


The Huawei OptiXstar P602E is an ONU designed for scenarios such as enterprise campus and video backhaul. It provides 4 GE ports to provide high-quality voice, data, and HD video services.

## Quick Specification

Table 1 shows the Quick Specification.

Model	OptiXstar P602E
Dimensions (W x D x H)	160mm x 110mm x 30mm (Without floor mat)
Weight	About 480g
Operating Temperature	-40°C to +55°C
Operating Humidity	5%RH to 95%RH (non-condensing)
Power Adapter Input	100V to 240V AC, 50/60Hz
System Power Supply	11V to 14V (typical 12 V), 1A
NNI	GPON
UNI	4*GE
Static Power Consumption	3.5 W
Maximum Power Consumption	5 W
Surge Protection Specifications	GE: common mode 6 kV; differential mode 1.5 kV. AC power: common mode 6 kV; differential mode 6 kV.

Figure 1 shows the appearance of OptiXstar P602E.

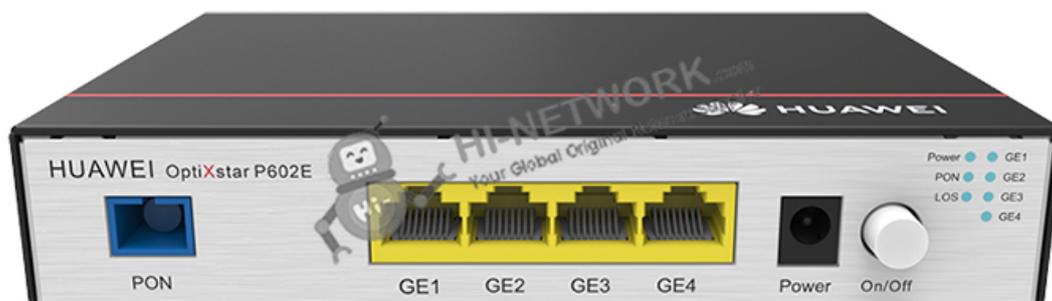



## Product Highlights

- Compact design, plug and play, flexible and easy to install.
- 802.1x and IPv6/IPv4 firewalls ensure device access security and network security.
- Supports -40°C to +55°C wide temperature range with strong environment adaptability.
- Features high reliability, 6 kV surge protection in common mode, and type B dual-homing service protection.

## Product Details

### Port Parameters

PON	<ul style="list-style-type: none"> <li>• Port type: SC/UPC</li> <li>• Complying with ITU-T G.984.2, Class B+</li> <li>• Receiver sensitivity: -27dBm;</li> <li>• Overload optical power: -8dBm;</li> <li>• Transmission rate: upstream 1.244 Gbit/s, downstream 2.488 Gbit/s</li> <li>• Type B single-homing</li> <li>• Type B dual-homing (supported in Layer 2 forwarding)</li> </ul>
GE	<ul style="list-style-type: none"> <li>• Port type: RJ-45</li> <li>• Auto ports speed (10/100/1000 Mbit/s)</li> <li>• Auto-MDI/MDIX</li> <li>• Configuration of the number of MAC addresses learned</li> <li>• VLAN transparent transmission/VLAN filtering</li> </ul>

### Function List

Automatic Service Provisioning	<ul style="list-style-type: none"> <li>• Authentication exemption</li> <li>• XML/OMCI/TR069</li> </ul>
Smart O&M	<ul style="list-style-type: none"> <li>• XML/Web UI</li> <li>• Rogue ONT detection and self-regulation</li> <li>• Ring network detection/PPPoE/DHCP simulation testing</li> </ul>
Layer 3 Features	<ul style="list-style-type: none"> <li>• Default/Static/Policy/Service routes</li> <li>• VLAN binding</li> <li>• ALG/UPnP/ARP</li> <li>• DDNS/DMZ/DNS/NAPT</li> <li>• PPPoE/Static IP/DHCP</li> <li>• Port mapping/Port trigger</li> <li>• IPv6</li> </ul>
Layer 2 Management	<ul style="list-style-type: none"> <li>• DHCP Option82</li> </ul>





	<ul style="list-style-type: none"> <li>• PITP</li> <li>• BPDU transparent transmission</li> <li>• LLDP/LLDP-MED</li> </ul>
Multicast	<ul style="list-style-type: none"> <li>• IGMP v2/v3 snooping</li> <li>• Dynamic controllable multicast</li> <li>• IGMP proxy</li> <li>• MLDv1/MLDv2 snooping</li> </ul>
QoS	<ul style="list-style-type: none"> <li>• Ethernet port rate limitation</li> <li>• 802.1p priority</li> <li>• SP/WRR/SP+WRR</li> </ul>
Security	<ul style="list-style-type: none"> <li>• 802.1x</li> <li>• IPv6/IPv4 firewalls</li> <li>• Filtering based on MAC/IP/URL</li> <li>• DoS/ARP anti-attacks</li> <li>• Static MAC address binding</li> <li>• Device access control</li> <li>• Web session number restriction</li> </ul>

## Compare to Similar Items

Table 2 shows the comparison.

Model	OptixStar P602E	<a href="#">OptixStar P603E</a>	<a href="#">OptixStar P612E</a>	<a href="#">OptixStar P613E</a>	<a href="#">OptixStar P622E</a>
NNI	GPON	GPON	GPON	GPON	Dual GPON
UNI	4*GE	8*GE	4*GE (PoE/PoE+)	8*GE, the POE1-POE4 ports support PoE/PoE+	4*GE

## Get More Information

Do you have any question about the OptiXstar P602E?

Contact us now via [info@hi-network.com](mailto:info@hi-network.com).

## Specification

OptiXstar P602E Specification	
Dimensions (W x D x H)	160mm x 110mm x 30mm (Without floor mat)
Weight	About 480g
Operating Temperature	-40°C to +55°C





Operating Humidity	5%RH to 95%RH (non-condensing)
Power Adapter Input	100V to 240V AC, 50/60Hz
System Power Supply	11V to 14V (typical 12 V), 1A
NNI	GPON
UNI	4*GE
Static Power Consumption	3.5 W
Maximum Power Consumption	5 W
Surge Protection Specifications	GE: common mode 6 kV; differential mode 1.5 kV. AC power: common mode 6 kV; differential mode 6 kV.
PON	<ul style="list-style-type: none"> <li>• Port type: SC/UPC</li> <li>• Complying with ITU-T G.984.2, Class B+</li> <li>• Receiver sensitivity: -27dBm;</li> <li>• Overload optical power: -8dBm;</li> <li>• Transmission rate: upstream 1.244 Gbit/s, downstream 2.488 Gbit/s</li> <li>• Type B single-homing</li> <li>• Type B dual-homing (supported in Layer 2 forwarding)</li> </ul>
GE	<ul style="list-style-type: none"> <li>• Port type: RJ-45</li> <li>• Auto ports speed (10/100/1000 Mbit/s)</li> <li>• Auto-MDI/MDIX</li> <li>• Configuration of the number of MAC addresses learned</li> <li>• VLAN transparent transmission/VLAN filtering</li> </ul>
Installation Mode	Support outdoor network box installation and indoor desktop installation, wall mounting, or network box installation.

## Want to Buy

[Get a Quote](#)


[Learn More](#) about Hi-Network



[Search](#) our Resource Library



[Follow](#) us on LinkedIn



Contact for [Sales](#) or [Support](#)





## Contact HI-NETWORK.COM For Global Fast Shipping

---

HongKong Office Tel: +00852-66181601

HangZhou Office Tel: +0086-571-86729517

Email: [info@hi-network.com](mailto:info@hi-network.com)

Skype: echo.hinetwork

WhatsApp Business: +8618057156223

