

Datasheet

[Get a Quote](#)

Overview


S2700-26TP-PWR-EI Mainframe(24 Ethernet 10/100 ports, 2 dual-purpose 10/100/1000 or SFP, PoE+, without power module)

Quick Specification

Model	S2700-26TP-PWR-EI
Part Number	02352336
Memory (RAM)	64 MB
Flash	16 MB
PoE	Supported
Dimensions (H x W x D)	43.6 mm x 442.0 mm x 420.0 mm (1.72 in. x 17.4 in. x 16.5 in.)
Weight	≤ 8 kg (17.64 lb)

Product Details:

The Front Panel:

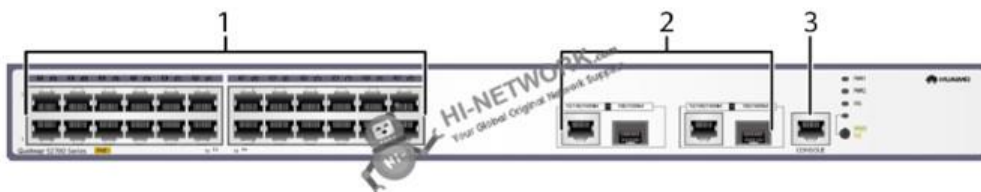

Datasheet

①	Twenty-four PoE+ 10/100BASE-TX ports
②	Two combo ports (10/100/1000BASE-T + 100/1000BASE-X)
③	One console port

The Back Panel:



④	Ground screw
⑤	ESD jack
⑥	Fan slot
⑦	Power module slot 2
⑧	Power module slot 1

The Accessories for S2700-26TP-PWR-EI

Recommended optical transceivers

Models	Descriptions
FE-SFP Optical Transceiver	
SFP-FE-SX-MM1310	Optical Transceiver,SFP,100M/155M,Multi-mode Module(1310nm,2km,LC)
eSFP-FE-LX-SM1310	Optical Transceiver,eSFP,100M/155M,Single-mode Module(1310nm,15km,LC)
S-SFP-FE-LH40-SM1310	Optical Transceiver, eSFP, FE, Single-mode Module(1310nm,40km,LC)
GE-SFP Optical Transceiver	
SFP-1000BaseT	Electrical Transceiver, SFP, GE, Electrical Interface Module(100m,RJ45)

Datasheet

eSFP-GE-SX-MM850	Optical Transceiver, eSFP, GE, Multi-mode Module(850nm,0.55km,LC)
SFP-GE-LX-SM1310	Optical Transceiver, eSFP, GE, Single-mode Module(1310nm,10km,LC)
S-SFP-GE-LH40-SM1310	Optical Transceiver, eSFP, GE, Single-mode Module(1310nm,40km,LC)
S-SFP-GE-LH40-SM1550	Optical Transceiver, eSFP, GE, Single-mode Module(1550nm,40km,LC)

Compare to Similar Items

Models	S2700-26TP-SI-AC	S2700-26TP-EI-AC	S2700-26TP-EI-DC	S2700-26TP-PWR-EI
Downlink Ports	24 Ethernet 10/100 ports	24 Ethernet 10/100 ports	24 Ethernet 10/100 ports	24 Ethernet 10/100 ports
Uplink Ports	2 dual-purpose 10/100/1,000 or SFP	2 dual-purpose 10/100/1,000 or SFP	2 dual-purpose 10/100/1,000 or SFP	2 dual-purpose 10/100/1,000 or SFP
Power Supply	AC	AC	DC	AC
PoE Support	N/A	N/A	N/A	PoE

Get more information:

Do you have any question about the S2700-26TP-PWR-EI 02352336?

Contact us now via e-mail: info@hi-network.com

Specific Data Sheet:

Part Number	02352336
Model	S2700-26TP-PWR-EI
Memory (RAM)	64 MB
Flash	16 MB
Mean time between failures (MTBF)	34.8 years
Mean time to repair (MTTR)	2 hours
Availability	> 0.99999
Service port surge protection	Common mode: ± 1 kV
Power supply surge protection	± 2 kV in differential mode, ± 4 kV in common mode
Dimensions (H x W x D)	43.6 mm x 442.0 mm x 420.0 mm (1.72 in. x 17.4 in. x 16.5 in.)
Weight	≤ 8 kg (17.64 lb)
Stack ports	Not supported
RPS	Not supported
PoE	Supported
Rated voltage range	100 V AC to 240 V AC, 50/60 Hz

Datasheet

Maximum voltage range	90 V AC to 264 V AC, 47 Hz to 63 Hz
Maximum power consumption (100% throughput)	808 W (system power consumption: 68 W, PoE: 740 W)
Operating temperature	-5°C to +50°C (23°F to 122°F)
Storage temperature	-40°C to +70°C (-40°F to +158°F)
Noise under normal temperature (27°C, sound power)	< 51 dB(A)
Relative humidity	5% to 95%, noncondensing
Operating altitude	0-5000 m (0-16404 ft.)
Certification	EMC certification Safety certification Manufacturing certification

Want to Buy

[Get a Quote](#)

[Learn More](#) about Hi-Network

[Search](#) our Resource Library

[Follow](#) us on LinkedIn

 Contact for [Sales or Support](#)

Contact HI-NETWORK.COM For Global Fast Shipping

HongKong Office Tel: +00852-66181601

HangZhou Office Tel: +0086-571-86729517

 Email: info@hi-network.com

 Skype: [echo.hinetwork](https://www.skype.com/people/echo.hinetwork)

WhatsApp Business: +8618057156223

