

[Get a Quote](#)

## Overview


Huawei S5700-28C-PWR-EI is a Layer 3 Ethernet switch. It supports 24 × 10/100/1000 Base-T (GE PoE) ports. It also provides two extended slots, one for an uplink sub-card and the other for a stack card.

## Quick Specification

Table 1 shows the quick specification.

Model	S5700-28C-PWR-EI
Part Number	02352361
Downlink Ports	24 × PoE+ 10/100/1000BASE-T ports
Extended Slots	2
Forwarding Performance	96 Mpps
Switching Capacity	256 Gbit/s
Stack	Supported
Stack Ports	Two stack ports available on each stack card
Power	2 power modules slot (need to purchase additional power)
Heat Dissipation	Pluggable fan modules for forced air cooling
Memory (RAM)	256 MB
Flash	32 MB
Dimensions (W x D x H)	44.2 cm x 42 cm x 4.36 cm

Figure 1 shows the appearance of S5700-28C-PWR-EI.

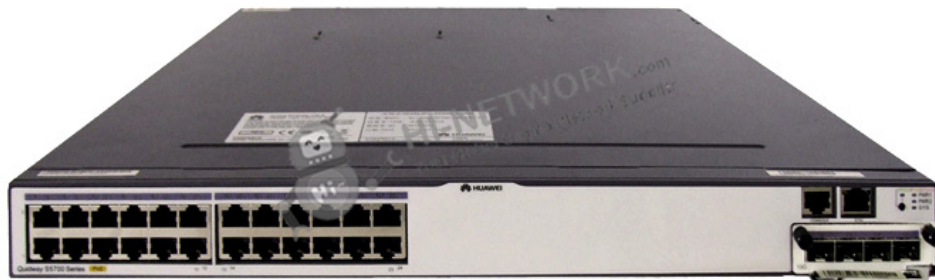

## Product Details


Figure 2 shows the front panel of S5700-28C-PWR-EI.



Note:

(1)	Twenty-four PoE+ 10/100/1000BASE-T ports	(3)	ETH management port
(2)	One console port	(4)	Sub-card slot with installed sub-card

Figure 3 shows the back panel of S5700-28C-PWR-EI.

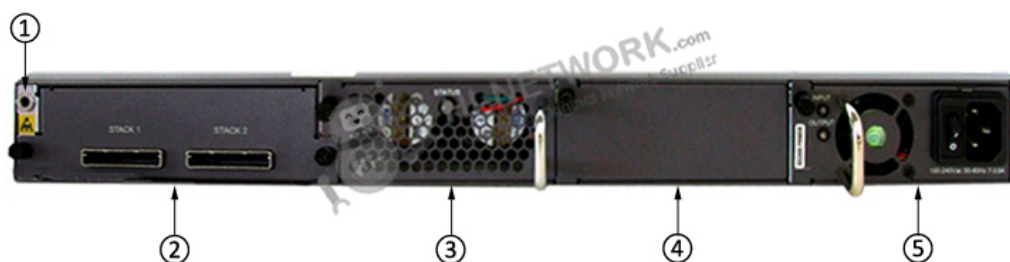

Note:

(1)	ESD jack	(4)	Power module slot 2
(2)	Rear card slot	(5)	Power module slot 1
(3)	Fan slot		

## The Transceiver

Table 2 shows the recommended transceivers.

Model	Description
GE-SFP Optical Transceiver	
<a href="#">SFP-1000BaseT</a>	Electrical Transceiver, SFP, GE, Electrical Interface Module (100m, RJ45)
<a href="#">eSFP-GE-SX-MM850</a>	Optical Transceiver, eSFP, GE, Multi-mode Module (850nm, 0.55km, LC)

<a href="#">SFP-GE-LX-SM1310</a>	Optical Transceiver, eSFP, GE, Single-mode Module (1310nm, 10km, LC)
<a href="#">S-SFP-GE-LH40-SM1310</a>	Optical Transceiver, eSFP, GE, Single-mode Module (1310nm, 40km, LC)
<a href="#">S-SFP-GE-LH40-SM1550</a>	Optical Transceiver, eSFP, GE, Single-mode Module (1550nm, 40km, LC)
10G-SFP+ Optical Transceiver	
<a href="#">SFP-10G-USR</a>	10GBase-USR Optical Transceiver, SFP+, 10G, Multi-mode Module (850nm, 0.1km, LC)
<a href="#">OMXD30000</a>	Optical Transceiver, SFP+, 10G, Multi-mode Module (850nm, 0.3km, LC)
<a href="#">OSX010000</a>	Optical Transceiver, SFP+, 10G, Single-mode Module (1310nm, 10km, LC)

## Compare to Similar Items

Table 3 shows the comparison of Huawei S5700-28C-PWR-EI and S5700-52C-PWR-EI.

Models	S5700-28C-PWR-EI	<a href="#">S5700-52C-PWR-EI</a>
Downlink Ports	24 × PoE+ 10/100/1000BASE-T ports	48 × PoE+ 10/100/1000BASE-T ports
Uplink Ports	Sub-cards supported the uplink ports.	Sub-cards supported the uplink ports.
Power Supply	Two power module slots (need to purchase additional power)	Two power module slots (need to purchase additional power)
PoE Supported	Yes	Yes

## Get more information

Do you have any question about the S5700-28C-PWR-EI (02352361)?

Contact us now via [info@hi-network.com](mailto:info@hi-network.com).

## Specification

<b>S5700-28C-PWR-EI Specification</b>	
Manufacturer	Huawei
Manufacturer Part Number	S5700-28C-PWR-EI
Form Factor	Fixed, Stackable
Switch Port	24 GE PoE ports, 4 GE Combo ports
Power Over Ethernet (PoE)	POE Switch, support POE+
Extended slot	Provide two extended slots, one for an uplink subcard and the other for a stack card.
Max Stack bandwidth	48Gbps
DRAM Memory	256 MB

Flash Memory	32 MB
<b>Performance</b>	
Forwarding performance	96 Mpps
MAC address table	IEEE 802.1d compliance
	32 K MAC address entries
	MAC address learning and aging
	Static, dynamic, and blackhole MAC address entries
	Packet filtering based on source MAC addresses
VLAN	4 K VLANs
Reliability	RRPP ring topology and RRPP multi-instance
	Smart Link tree topology and Smart Link multi-instance, providing the millisecond-level protection switchover
	SEP
	STP, RSTP, and MSTP
	BPDU protection, root protection, and loop protection
	E-Trunk
IP routing	Static routing, ECMP
	RIPv1, RIPv2 and RIPv6
IPv6 features	Neighbor Discovery (ND)
	Path MTU (PMTU)
	IPv6 ping, IPv6 tracert, and IPv6 Telnet
	ACLs based on the source IPv6 address, destination IPv6 address, Layer 4 ports, or protocol type
	MLD v1/v2 snooping
	6to4 tunnel, ISATAP tunnel, and manually configured tunnel
Multicast	IGMP v1/v2/v3 snooping and IGMP fast leave
	Multicast forwarding in a VLAN and multicast replication between VLANs
	Multicast load balancing among member ports of a trunk
	Controllable multicast
	Port-based multicast traffic statistics
QoS/ACL	Rate limiting on packets sent and received by an interface
	Packet redirection
	Port-based traffic policing and two-rate three-color CAR
	Eight queues on each port
	WRR, DRR, SP, WRR+SP, and DRR+SP queue scheduling algorithms
	Re-marking of the 802.1p priority and DSCP priority
	Packet filtering at Layers 2 through 4, filtering out invalid frames based on the source MAC address, destination

	MAC address, source IP address, destination IP address, port number, protocol type, and VLAN ID
	Rate limiting in each queue and traffic shaping on ports
Security	User privilege management and password protection
	DoS attack defense, ARP attack defense, and ICMP attack defense
	Binding of the IP address, MAC address, interface, and VLAN
	Port isolation, port security, and sticky MAC
	Blackhole MAC address entries
	Limit on the number of learned MAC addresses
	802.1x authentication and limit on the number of users on an interface
	AAA authentication, RADIUS authentication, HWTACACS authentication, and NAC
	SSH v2.0
	Hypertext Transfer Protocol Secure (HTTPS)
	CPU defense
	Blacklist and whitelist
<b>Management</b>	
Management and maintenance	Stacking
	MAC Forced Forwarding (MFF)
	Virtual cable test
	Port mirroring and RSPAN (remote port mirroring)
	Remote configuration and maintenance by using Telnet
	SNMP v1/v2/v3
	RMON
	Web NMS
	HGMP
	System logs and alarms of different levels
	GVRP
MUX VLAN	
<b>Power Supply Specifications</b>	
Power Device	Power supply - support PoE+
Power Redundancy	No
Voltage Required	AC 120/230 V (50/60 Hz)
<b>Dimensions / Weight / Miscellaneous</b>	
Width	44.2cm
Depth	43.6cm
Height	22.0cm

Weight	5.0kg
<b>System Software</b>	
Software Version	Enhanced Version
<b>Manufacturer Warranty</b>	
Service & Support	1 year warranty

## Want to Buy

Get a Quote



[Learn More](#) about Hi-Network



[Search](#) our Resource Library



[Follow](#) us on LinkedIn



Contact for [Sales or Support](#)

## Contact HI-NETWORK.COM For Global Fast Shipping

HongKong Office Tel: +00852-66181601

HangZhou Office Tel: +0086-571-86729517

Email: [info@hi-network.com](mailto:info@hi-network.com)

Skype: echo.hinetwork

WhatsApp Business: +8618057156223