

Datasheet

[Get a Quote](#)

Overview

S5720-52X-SI-48S, Huawei S5700 Series Switches

Quick Specification


| | |
|--------------------------------|--|
| Model | S5720-52X-SI-48S |
| Part Number | 98010814 |
| Memory (RAM) | 512 MB |
| Flash | 512 MB in total. To view the available flash memory size, run the display version command. |
| PoE | Not supported |
| Weight with packaging [kg(lb)] | 8.05 kg (17.75 lb) |
| Dimensions (H x W x D) | <p>Basic dimensions (excluding the parts protruding from the body): 44.4 mm x 442.0 mm x 424.9 mm (1.75 in. x 17.4 in. x 16.73 in.)</p> <p>Maximum dimensions (the depth is the distance from ports on the front panel to the handle on the rear panel): 44.4 mm x 442.0 mm x 451.3 mm (1.75 in. x 17.4 in. x 17.77 in.)</p> |



Datasheet

Product Details:

Appearance:

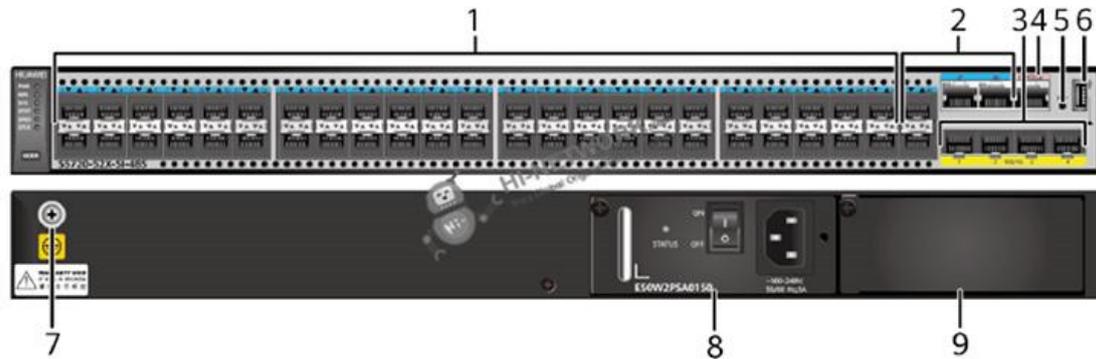

| | |
|---|--|
| ① | Forty-six 100/1000BASE-X ports |
| ② | Two combo ports (10/100/1000BASE-T + 100/1000BASE-X) |
| ③ | Four 10GE SFP+ ports |
| ④ | One console port |
| ⑤ | One PNP button |
| ⑥ | One USB port |
| ⑦ | Ground screw |
| ⑧ | Power module slot 2 |
| ⑨ | Power module slot 1 |

Get more information:

Do you have any question about the S5720-52X-SI-48S 98010814?

Contact us now via e-mail: info@hi-network.com

Specific Data Sheet:

| | |
|-----------------------------------|--|
| Part Number | 98010814 |
| Model | S5720-52X-SI-48S |
| Memory (RAM) | 512 MB |
| Flash | 512 MB in total. To view the available flash memory size, run the display version command. |
| Mean time between failures (MTBF) | 35.23 years |



Datasheet

| | |
|--|---|
| Mean time to repair (MTTR) | 2 |
| Availability | > 0.99999 |
| Service port surge protection | Common mode: ± 7 kV |
| Power supply surge protection | Using AC power modules: ± 6 kV in differential mode, ± 6 kV in common mode Using DC power modules: ± 1 kV in differential mode, ± 2 kV in common mode |
| Dimensions (H x W x D) | Basic dimensions (excluding the parts protruding from the body): 44.4 mm x 442.0 mm x 424.9 mm (1.75 in. x 17.4 in. x 16.73 in.) Maximum dimensions (the depth is the distance from ports on the front panel to the handle on the rear panel): 44.4 mm x 442.0 mm x 451.3 mm (1.75 in. x 17.4 in. x 17.77 in.) |
| Weight (with packaging) | 8.05 kg (17.75 lb) |
| Stack ports | GE optical ports and 10GE SFP+ optical ports except combo ports on the front panel |
| RTC | Supported |
| RPS | Not supported |
| PoE | Not supported |
| Rated voltage range | 100 V AC to 240 V AC, 50/60 Hz -48 V DC to -60 V DC |
| Maximum voltage range | 90 V AC to 264 V AC, 47 Hz to 63 Hz -36 V DC to -72 V DC |
| Maximum power consumption (100% throughput, full speed of fans) | 85 W |
| Typical power consumption (30% of traffic load) <ul style="list-style-type: none"> • Tested according to ATIS standard • EEE enabled • No PoE power consumption | 65 W |
| Operating temperature | 0°C to 45°C (32°F to 113°F) at an altitude of 0-1800 m (0-5906 ft.) |
| Short-term operating temperature | -5°C to +55°C (23°F to 131°F) at an altitude of 0-1800 m (0-5906 ft.) |
| Storage temperature | -40°C to +70°C (-40°F to +158°F) |
| Noise under normal temperature (27°C, sound power) | < 49 dB(A) |
| Relative humidity | 5% to 95%, noncondensing |
| Operating altitude | AC power modules configured: 0-5000 m (0-16404 ft.) DC power modules configured: 0-2000 m (0-6562 ft.) |
| Certification | EMC certification Safety certification Manufacturing certification |

Want to Buy



Datasheet

Get a Quote



[Learn More](#) about Hi-Network



[Search](#) our Resource Library



[Follow](#) us on LinkedIn



Contact for [Sales or Support](#)

Contact HI-NETWORK.COM For Global Fast Shipping

HongKong Office Tel: +00852-66181601

HangZhou Office Tel: +0086-571-86729517

Email: info@hi-network.com

Skype: echo.hinetwork

WhatsApp Business: +8618057156223

