

[Get a Quote](#)

## Overview

S5735-L8T4S-QA1 (8\*10/100/1000BASE-T ports, 4\*GE SFP ports, AC power, Fanless).

## Quick Specification

Table 1 shows the Quick Specification.


Model	S5735-L8T4S-QA1
Part Number	98011551
Description	S5735-L8T4S-QA1 (8*10/100/1000BASE-T ports, 4*GE SFP ports, AC power, Fanless)
First supported version	V200R021C00
Dimensions without packaging (H x W x D) [mm(in.)]	<p>Basic dimensions (excluding the parts protruding from the body): 43.6 mm x 320.0 mm x 210.0 mm (1.72 in. x 12.6 in. x 8.27 in.)</p> <p>Maximum dimensions (the depth is the distance from ports on the front panel to the parts protruding from the rear panel): 43.6 mm x 320.0 mm x 217.0 mm (1.72 in. x 12.6 in. x 8.54 in.)</p>
Memory	512 MB
Flash memory	512 MB
PoE	Not supported

Figure 1 shows the appearance of S5735-L8T4S-QA1.



## Product Details

Figure 2 shows the structure of S5735-L8T4S-QA1.

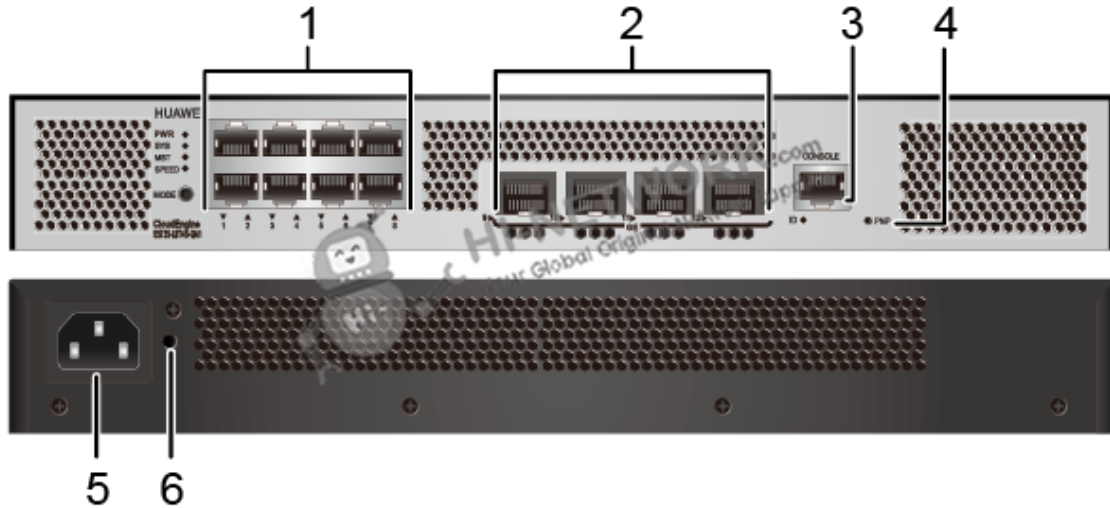

Note:

(1)	Eight 10/100/1000BASE-T ports	(4)	One PNP button
(2)	Four 1000BASE-X ports	(5)	AC socket
(3)	One console port	(6)	Jack for AC power cable locking strap

## Get More Information

Do you have any question about the S5735-L8T4S-QA1 (98011551)?

Contact us now via [info@hi-network.com](mailto:info@hi-network.com).

## Specification

S5735-L8T4S-QA1 Specification	
Model	S5735-L8T4S-QA1
Part Number	98011551
Description	S5735-L8T4S-QA1 (8*10/100/1000BASE-T ports, 4*GE SFP ports, AC power, Fanless)
First supported version	V200R021C00
Dimensions without packaging (H x W x D) [mm(in.)]	<p>Basic dimensions (excluding the parts protruding from the body): 43.6 mm x 320.0 mm x 210.0 mm (1.72 in. x 12.6 in. x 8.27 in.)</p> <p>Maximum dimensions (the depth is the distance from ports on the front panel to the parts protruding from the rear panel): 43.6 mm x 320.0 mm x 217.0 mm (1.72 in. x 12.6 in. x 8.54 in.)</p>

Dimensions with packaging (H x W x D) [mm(in.)]	90.0 mm x 465.0 mm x 380.0 mm (3.54 in. x 18.31 in. x 14.96 in.)
Chassis height [U]	1
Weight without packaging [kg(lb)]	2.30 (5.07)
Weight with packaging [kg(lb)]	3.10 (6.83)
Typical power consumption [W]	20.5
Typical heat dissipation [BTU/hour]	69.95
Maximum power consumption [W]	22
Maximum heat dissipation [BTU/hour]	75.07
MTBF [year]	71.82
MTTR [hour]	2
Availability	>0.99999
Noise at normal temperature (acoustic power) [dB(A)]	Noise-free (no fans), < 30
Noise at normal temperature (acoustic pressure) [dB(A)]	Noise-free (no fans), < 20
Number of card slots	0
Number of power slots	0
Number of fans modules	0
Redundant power supply	Not supported
Long-term operating temperature [°C(°F)]	-5°C to +45°C (23°F to 113°F) at an altitude of 0 to 1800 m (0 to 5905.51 ft.)
Restriction on the operating temperature variation rate [°C(°F)]	<p>When the altitude is 1800-5000 m (5906-16404 ft.), the highest operating temperature reduces by 1°C (1.8°F) every time the altitude increases by 220 m (722 ft.).</p> <p>Devices cannot start when the temperature is lower than 0°C (32°F).</p> <p>When the following optical modules are used, the device can operate in the temperature range of -5°C to +40°C (23°F to 104°F):</p> <ul style="list-style-type: none"> <li>- 10GE non-industrial optical module with a transmission distance of 10 km</li> <li>- Non-industrial FE/GE optical module with a transmission distance of 40 km or 80 km</li> </ul>
Storage temperature [°C(°F)]	-40°C to +70°C (-40°F to +158°F)
Long-term operating relative humidity [RH]	5% to 95%, noncondensing
Long-term operating altitude [m(ft.)]	0-5000 m (0-16404 ft.)
Storage altitude [m(ft.)]	0-5000 m (0-16404 ft.)
Power supply mode	AC built-in
Rated input voltage [V]	AC input: 100 V AC to 240 V AC, 50/60 Hz
Input voltage range [V]	AC input: 90 V AC to 290 V AC, 45 Hz to 65 Hz
Memory	512 MB
Flash memory	512 MB
Console port	RJ45
Eth Management port	Not supported
USB	Not supported

RTC	Not supported
RPS input	Not supported
Service port surge protection [kV]	Common mode: $\pm 7$ kV
Power supply surge protection [kV]	$\pm 6$ kV in differential mode, $\pm 6$ kV in common mode
Types of fans	None
Heat dissipation mode	Natural heat dissipation
Airflow direction	-
PoE	Not supported
Certification	EMC certification Safety certification Manufacturing certification

## Want to Buy

[Get a Quote](#)

[Learn More](#) about Hi-Network

[Search](#) our Resource Library

[Follow](#) us on LinkedIn

 Contact for [Sales or Support](#)

## Contact HI-NETWORK.COM For Global Fast Shipping

HongKong Office Tel: +00852-66181601

HangZhou Office Tel: +0086-571-86729517

 Email: [info@hi-network.com](mailto:info@hi-network.com)

 Skype: [echo.hinetwork](https://www.skype.com/add?contact=echo.hinetwork)

WhatsApp Business: +8618057156223

