

Datasheet

[Get a Quote](#)

Overview

The S6720-LI series switches (S6720-LI) are next-generation simplified 10GE fixed switches and can be used as 10GE access switches on campus networks and data center networks. The S6720-LI provides line-rate 10GE access ports and 40GE uplink ports. In addition, the S6720-LI delivers a wide variety of services, comprehensive security control policies, and various QoS features to help customers build scalable, reliable, manageable, and secure campus and data center networks.


Quick Specification

Model	S6720S-26Q-LI-24S-AC
Part Number	98010685
Memory	1 GB
Flash memory	512 MB in total. To view the available flash memory size, run the display version command.
PoE	Not supported
Weight with packaging [kg(lb)]	4.2 kg (9.26 lb)
Dimensions (H x W x D)	Basic dimensions (excluding the parts protruding from the body): 43.6 mm x 442.0 mm x 225.0 mm (1.72 in. x 17.4 in. x 8.86 in.) Maximum dimensions (the depth is the distance from ports on the front panel to the parts protruding from the rear panel): 43.6 mm x 442.0 mm x 234.4 mm (1.72 in. x 17.4 in. x 9.23 in.)

Datasheet

Product Details:

Appearance:

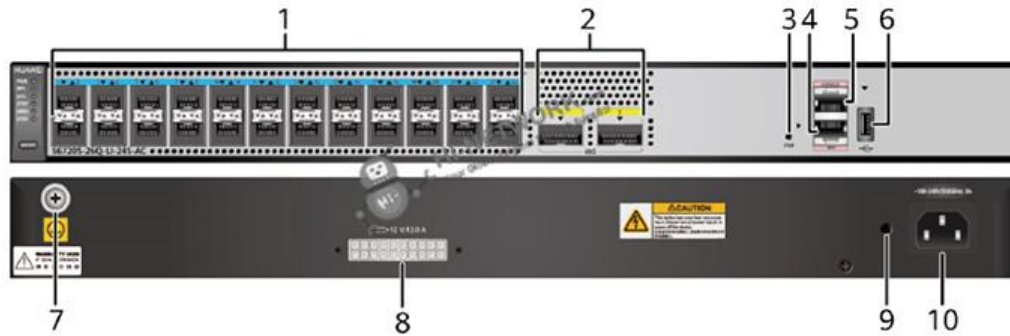

①	Twenty-four 10GE SFP+ ports
②	Two 40GE QSFP+ ports
③	One PNP button
④	One ETH management port
⑤	One console port
⑥	One USB port
⑦	Ground screw
⑧	RPS socket
⑨	Jack for AC power cable locking strap
⑩	AC socket

Accessories for S6720S-26Q-LI-24S-AC:

Recommended Products:

Model	Description
eSFP-GE-ZX100-SM1550	Optical Transceiver,eSFP,GE,Single-mode Module(1550nm,100km,LC)
SFP-GE-LX-SM1310-BIDI	Optical Transceiver,eSFP,GE,BIDI Single-mode Module(TX1310/RX1490,10km,LC)
SFP-GE-LX-SM1490-BIDI	Optical Transceiver,eSFP,GE,BIDI Single-mode Module(TX1490/RX1310,10km,LC)
LE2MGSC40DE0	Optical Transceiver,eSFP,GE,BIDI Single-mode Module(TX1310/RX1490,40km,LC)
LE2MGSC40ED0	Optical Transceiver,eSFP,GE,BIDI Single-mode Module(TX1490/RX1310,40km,LC)

Datasheet

SFP-GE-ZBXD1	Optical Transceiver,eSFP,GE,BIDI Single-mode Module(1570nm(Tx)/1490nm(Rx),80km,LC)
SFP-GE-ZBXU1	Optical Transceiver,eSFP,GE,BiDi Single-mode Module(1490nm(Tx)/1570nm(Rx),80km,LC)
SFP-GE-BXU1-SC	1000Base,BIDI Optical Transceiver,SFP,GE,Single-mode Module(TX1490nm/RX1310nm,10km,SC)
CWDM-SFPGE-1471	CWDM Optical Transceiver,eSFP,2.5G,Single-mode Module(1471nm,80km,LC)
CWDM-SFPGE-1491	CWDM Optical Transceiver,eSFP,2.5G,Single-mode Module(1491nm,80km,LC)
DWDM-SFPGE-1560-61	DWDM Optical Transceiver,eSFP,2.5G,Single-mode Module(1560.61nm,120km,LC)
SFP-1000BaseT	Electrical Transceiver,SFP,GE,Electrical Interface Module(100m,RJ45)
SFP-10G-USR	10GBase-USR Optical Transceiver,SFP+,10G,Multi-mode Module(850nm,0.1km,LC)
OMXD30000	Optical Transceiver,SFP+,10G,Multi-mode Module(850nm,0.3km,LC)
SFP-10G-iLR	Optical Transceiver,SFP+,10G,Single-mode Module(1310nm,1.4km,LC)
OSX010000	Optical Transceiver,SFP+,10G,Single-mode Module(1310nm,10km,LC)
OSX040N01	Optical Transceiver,SFP+,10G,Single-mode Module(1550nm,40km,LC)
SFP-10G-ER-1310	Optical Transceiver,SFP+,10G,Single-mode Module(1310nm,40km,LC)
SFP-10G-ZR	10GBase-ZR Optical Transceiver,SFP+,10G,Single-mode Module(1550nm,80km,LC)
SFP-10G-BXU1	10GBase,BIDI Optical Transceiver,SFP+,10G,Single-mode Module(TX1270nm/RX1330nm,10km,LC)

Compare To Similar Items:

Product Code	S6720-26Q-LI-24S-AC	S6720S-26Q-LI-24S-AC
Fixed ports	24x10GE port, 2x40GE port	24x10GE port, 2x40GE port
Dimensions (W x D x H, mm)	420 x 220 x 43.6	420 x 220 x 43.6
Chassis height(U)	1U	1U
CPU Frequency	1 GHz	1 GHz
CPU Cores	2	2
Memory (RAM)	1 GB	1 GB
Rated voltage range	AC: 100 V AC to 240 V AC, 50/60 Hz	AC: 100 V AC to 240 V AC, 50/60 Hz
Maximum voltage range	AC: 90 V AC to 264 V AC; 47-63 Hz	AC: 90 V AC to 264 V AC; 47-63 Hz
Maximum input current	3 A	3 A
Minimum power consumption	100.2 W	100.2 W

Get more information:

Do you have any question about the S6720S-26Q-LI-24S-AC 98010685?

Contact us now via e-mail: info@hi-network.com

Datasheet

Specific Data Sheet:

Part Number	98010685
Model	S6720S-26Q-LI-24S-AC
Memory (RAM)	1 GB
Flash	512 MB in total. To view the available flash memory size, run the display version command.
Mean time between failures (MTBF)	39.2 years
Mean time to repair (MTTR)	2
Availability	> 0.99999
Service port surge protection	NA
Power supply surge protection	±6 kV in differential mode, ± 6 kV in common mode
Dimensions (H x W x D)	Basic dimensions (excluding the parts protruding from the body): 43.6 mm x 442.0 mm x 225.0 mm (1.72 in. x 17.4 in. x 8.86 in.) Maximum dimensions (the depth is the distance from ports on the front panel to the parts protruding from the rear panel): 43.6 mm x 442.0 mm x 234.4 mm (1.72 in. x 17.4 in. x 9.23 in.)
Weight (with packaging)	4.2 kg (9.26 lb)
Stack ports	Any 10GE SFP+ ports (a maximum of 16 physical ports) Any 40GE QSFP+ ports (a maximum of 2 physical ports)
RTC	Supported
RPS	Supported
PoE	Not supported
Rated voltage range	100 V AC to 240 V AC, 50/60 Hz
Maximum voltage range	90 V AC to 264 V AC, 47 Hz to 63 Hz
Maximum power consumption (100% throughput, full speed of fans)	100.2 W
Typical power consumption (30% of traffic load, tested according to ATIS standard)	67.1 W
Operating temperature	0°C to 45°C (32°F to 113°F) at an altitude of 0-1800 m (0-5906 ft.)
Short-term operating temperature	-5°C to +50°C (23°F to 122°F) at an altitude of 0-1800 m (0-5906 ft.)
Storage temperature	-40°C to +70°C (-40°F to +158°F)
Noise under normal temperature (27°C, sound power)	< 46.5 dB(A)
Relative humidity	5% to 95%, noncondensing
Operating altitude	0-5000 m (0-16404 ft.)
Certification	EMC certification Safety certification Manufacturing certification



Want to Buy

Get a Quote



[Learn More](#) about Hi-Network



[Search](#) our Resource Library



[Follow](#) us on LinkedIn



Contact for [Sales or Support](#)

Contact HI-NETWORK.COM For Global Fast Shipping

HongKong Office Tel: +00852-66181601

HangZhou Office Tel: +0086-571-86729517

Email: info@hi-network.com

Skype: echo.hinetwork

WhatsApp Business: +8618057156223

