

Overview

Huawei S6720-SI series are next-generation multi-gigabit fixed switches. They are ideal for high-speed wireless device access, 10 GE data center server access, and campus network access/aggregation.

Quick Specification

Table 1 shows the quick specification.


Model	S6720-32C-SI-AC
Part Number	98010715
Description	S6720-32C-SI Bundle (24 Ethernet 100M/1/2.5/5/10G ports, 4 10 Gig SFP+, with 1 interface slot, with 150W AC power supply)
Memory	1 GB
Flash memory	512 MB in total. To view the available flash memory size, run the display version command.
Typical power consumption	93 W
Relative humidity	5% to 95%, noncondensing

Figure 1 shows the appearance of S6720-32C-SI-AC.



Product Details

Figure 2 shows the structure of S6720-32C-SI-AC.

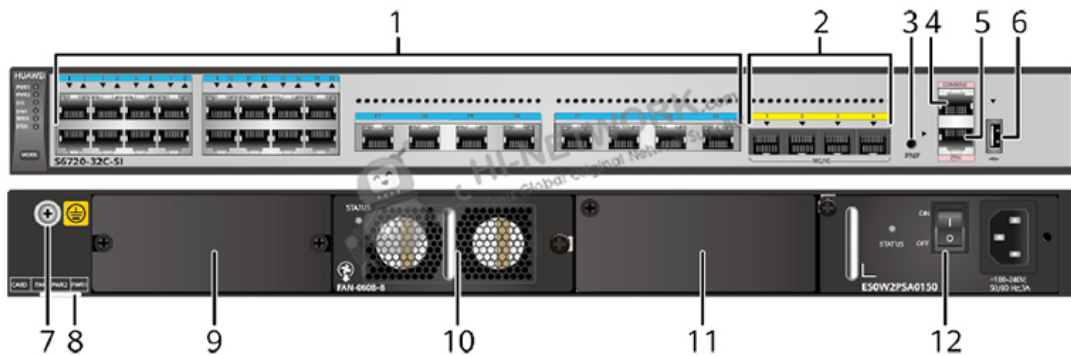

Note:

(1)	Twenty-four 100M/1000M/2.5GE/5GE/10GE BASE-T ports (MultiGE port)	(7)	Ground screw
(2)	Four 10GE SFP+ ports	(8)	ESN label
(3)	One PNP button	(9)	Rear card slot
(4)	One console port	(10)	Fan slot
(5)	One ETH management port	(11)	Power module slot 2
(6)	One USB port	(12)	Power module slot 1

Get More Information

Do you have any question about the S6720-32C-SI-AC (98010715)?

Contact us now via info@hi-network.com.

Specification

S6720-32C-SI-AC Datasheet	
Model	S6720-32C-SI-AC
Part Number	98010715
Description	S6720-32C-SI Bundle (24 Ethernet 100M/1/2.5/5/10G ports, 4 10 Gig SFP+, with 1 interface slot, with 150W AC power supply)
Dimensions (H x W x D)	Basic dimensions (excluding the parts protruding from the body): 44.4 mm x 442.0 mm x 425.0 mm (1.75 in. x 17.4 in. x 16.73 in.)



	Maximum dimensions (the depth is the distance from ports on the front panel to the handle on the rear panel): 44.4 mm x 442.0 mm x 451.3 mm (1.75 in. x 17.4 in. x 17.77 in.)
Memory (RAM)	8.7 kg (19.18 lb)
Flash	1 GB
Mean time between failures (MTBF)	512 MB in total. To view the available flash memory size, run the display version command.
Mean time between failures (MTBF)	27.4 years
Mean time to repair (MTTR)	2 hours
Availability	> 0.99999
Service port surge protection	Common mode: ± 7 kV
Power supply surge protection	Using AC power modules: ± 6 kV in differential mode, ± 6 kV in common mode Using DC power modules: ± 1 kV in differential mode, ± 2 kV in common mode
Stack ports	Any MultiGE, 10GE SFP+, or 40GE QSFP+ ports (a maximum of 16 physical ports)
RTC	Supported
RPS	Not supported
PoE	Not supported
Rated voltage range	100 V AC to 240 V AC, 50/60 Hz -48 V DC to -60 V DC
Maximum voltage range	90 V AC to 264 V AC, 47 Hz to 63 Hz -36 V DC to -72 V DC
Maximum power consumption (100% throughput, full speed of fans)	117.62 W (without card)
Typical power consumption (30% of traffic load, tested according to ATIS standard)	93 W (without card)
Operating temperature	0°C to 45°C (32°F to 113°F) at an altitude of 0-1800 m (0-5906 ft.) NOTE: When the altitude is 1800-5000 m (5906-16404 ft.), the highest operating temperature reduces by 1°C (1.8°F) every time the altitude increases by 220 m (722 ft.).
Short-term operating temperature	-5°C to +50°C (23°F to 122°F) at an altitude of 0-1800 m (0-5906 ft.) NOTE: When the altitude is 1800-5000 m (5906-16404 ft.), the highest operating temperature reduces by 1°C (1.8°F) every time the altitude increases by 220 m (722 ft.). The equipment can operate beyond the normal operating temperature range for a short-term period, but the following conditions must be met: The equipment operates at a temperature of over 45°C (113°F) consecutively for at most 96 hours in one year. The equipment operates at a temperature of over 45°C (113°F) for a total of no more than 360 hours in one year. The equipment operates at a temperature of over 45°C (113°F) for no more in 15





	<p>times in one year.</p> <p>The equipment may be damaged or experience unexpected exceptions if any of the preceding limits is exceeded.</p> <p>The equipment cannot start when the temperature is lower than 0°C (32°F). The maximum distance of optical modules used in these conditions cannot exceed 10 km.</p>
Storage temperature	-40°C to +70°C (-40°F to +158°F)
Noise under normal temperature (27°C, sound power)	< 62.3 dB(A)
Relative humidity	5% to 95%, noncondensing
Operating altitude	AC power modules configured: 0-5000 m (0-16404 ft.) DC power modules configured: 0-2000 m (0-6562 ft.)
Certification	EMC certification Safety certification Manufacturing certification

Want to Buy

[Get a Quote](#)[Learn More](#) about Hi-Network[Search](#) our Resource Library[Follow](#) us on LinkedInContact for [Sales or Support](#)

Contact HI-NETWORK.COM For Global Fast Shipping

HongKong Office Tel: +00852-66181601

HangZhou Office Tel: +0086-571-86729517

Email: info@hi-network.com

Skype: echo.hinetwork

WhatsApp Business: +8618057156223

