

Datasheet

[Get a Quote](#)

Overview

S6730S-H24X6C-A Bundle (24*10GE SFP+ ports, 6*40GE/100GE QSFP28 ports, with license, 1*600W AC power)

Quick Specification

Model	S6730S-H24X6C-A
Part Number	02353HVK/02353HVK-001/02353HVK-003/02353HVK-004
Memory	4 GB
Flash memory	2 GB in total. To view the available flash memory size, run the display version command.
PoE	Not supported
Weight (with packaging)	9.84 kg (21.69 lb)
Dimensions (H x W x D)	<p>Basic dimensions (excluding the parts protruding from the body): 43.6 mm x 442.0 mm x 420.0 mm (1.72 in. x 17.4 in. x 16.5 in.)</p> <p>Maximum dimensions (the depth is the distance from ports on the front panel to the handle on the rear panel): 43.6 mm x 442.0 mm x 446.0 mm (1.72 in. x 17.4 in. x 17.6 in.)</p>


Difference between Part Number

Model	S6730S-H24X6C-A			
Part Number	02353HVK	02353HVK-001	02353HVK-003	02353HVK-004
Heat dissipation mode	Heat dissipation with fan, intelligent fan speed adjustment	Heat dissipation with fan, intelligent fan speed adjustment	Air cooling for heat dissipation, intelligent fan speed adjustment	Air cooling for heat dissipation, intelligent fan speed adjustment
Long-term operating temperature [° C(° F)]	-5° C to +45° C (23° F to 113° F) at an altitude of 0-1800 m (0-5906 ft.)	-5° C to +45° C (23° F to 113° F) at an altitude of 0-1800 m (0-5906 ft.)	- 5° C to +45° C (23° F to 113° F) at an altitude of 0 to 1800 m (0 to 5905.51 ft.)	- 5° C to +45° C (23° F to 113° F) at an altitude of 0 to 1800 m (0 to 5905.44 ft.)


Datasheet

Product Details:

The Front Panel:

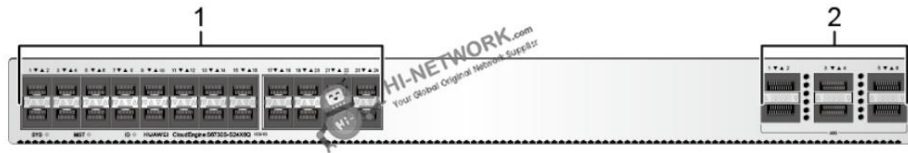

The Back Panel:

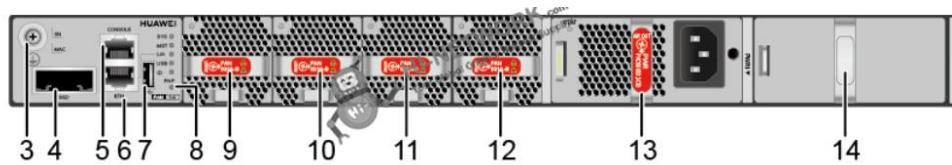

①	Twenty-four 10GE SFP+ ports
②	Six 40GE/100GE QSFP28 optical ports
③	Ground screw
④	SSD card slot
⑤	One console port
⑥	One ETH management port
⑦	One USB port
⑧	One PNP button
⑨	Fan module slot 1
⑩	Fan module slot 2
⑪	Fan module slot 3
⑫	Fan module slot 4
⑬	Power module slot 1
⑭	Power module slot 2

Get more information:

Do you have any question about the S6730S-H24X6C-A 02353HVK/02353HVK -001/02353HVK -003/02353HVK -004?

Contact us now via e-mail: info@hi-network.com

Datasheet

Specific Data Sheet:

Part Number	02353HVK/02353HVK -001/02353HVK -003/02353HVK -004
Model	S6730S-H24X6C-A
Memory (RAM)	4 GB
Flash	2 GB in total. To view the available flash memory size, run the display version command.
Mean time between failures (MTBF)	62.27 years
Mean time to repair (MTTR)	2 hours
Availability	> 0.99999
Service port surge protection	N/A
Power supply surge protection	Using AC power modules: ± 6 kV in differential mode, ± 6 kV in common mode Using DC power modules: ± 2 kV in differential mode, ± 4 kV in common mode
Dimensions (H x W x D)	Basic dimensions (excluding the parts protruding from the body): 43.6 mm x 442.0 mm x 420.0 mm (1.72 in. x 17.4 in. x 16.5 in.) Maximum dimensions (the depth is the distance from ports on the front panel to the handle on the rear panel): 43.6 mm x 442.0 mm x 446.0 mm (1.72 in. x 17.4 in. x 17.6 in.)
Weight (with packaging)	9.84 kg (21.69 lb)
Stack ports	Any 10GE SFP+ ports (a maximum of 16 physical ports) Any 40GE QSFP+ ports (a maximum of 6 physical ports)
RTC	Supported
RPS	Not supported
PoE	Not supported
Rated voltage range	AC input: 100 V AC to 240 V AC, 50/60 Hz High-Voltage DC input: 240 V DC DC input: -48 V DC to -60 V DC
Maximum voltage range	AC input: 90 V AC to 290 V AC, 45 Hz to 65 Hz High-Voltage DC input: 190 V DC to 290 V DC DC input: -38.4 V DC to -72 V DC
Maximum power consumption (100% throughput, full speed of fans)	254 W
Typical power consumption (30% of traffic load, tested according to ATIS standard)	149 W
Operating temperature	-5°C to +45°C (23°F to 113°F) at an altitude of 0-1800 m (0-5906 ft.)
Storage temperature	-40°C to +70°C (-40°F to +158°F)
Noise under normal temperature (27°C, sound power)	< 65 dB(A)
Relative humidity	5% to 95%, noncondensing
Operating altitude	0-5000 m (0-16404 ft.)
Certification	EMC certification Safety certification



Datasheet

Manufacturing certification

Want to Buy

Get a Quote



[Learn More](#) about Hi-Network



[Search](#) our Resource Library



[Follow](#) us on LinkedIn



Contact for [Sales or Support](#)

Contact HI-NETWORK.COM For Global Fast Shipping

HongKong Office Tel: +00852-66181601

HangZhou Office Tel: +0086-571-86729517

Email: info@hi-network.com

Skype: echo.hinetwork

WhatsApp Business: +8618057156223

