

Datasheet

[Get a Quote](#)

Overview


S1730S-S48T4S-A is a Huawei S1730S series switch, providing 48 10/100/1000BASE-T Ethernet ports, 4 Gigabit SFP, and AC power supply. Huawei CloudEngine S1730S series switches are designed for small to medium-sized businesses, including Internet cafes, hotels, schools, and others. With feature-rich services and a silent energy-saving design that's easy to install and maintain, CloudEngine S1730S helps customers build secure, reliable, and high-performance networks.

Quick Specification

Model	S1730S-S48T4S-A
Part Number	98010902
Memory	1 GB
Flash memory	512 MB in total. To view the available flash memory size, run the display version command.
Weight with packaging [kg(lb)]	4.42
Dimension (H × W × D)	<p>Basic dimensions (excluding the parts protruding from the body): 43.6 mm x 442.0 mm x 220.0 mm (1.72 in. x 17.4 in. x 8.7 in.)</p> <p>Maximum dimensions (the depth is the distance from ports on the front panel to the parts protruding from the rear panel): 43.6 mm x 442.0 mm x 227.0 mm (1.72 in. x 17.4 in. x 8.94 in.)</p>

Product Details:

The Front Panel:

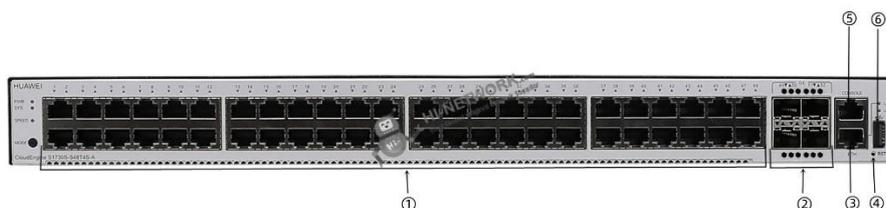

①	48 x 10/100/1000Base-T (PoE+) ports
②	Four 1000BASE-X ports

Datasheet

③	One ETH management port
④	One RST button
⑤	One console port
⑥	One USB port

The Back Panel:



①	Ground screw
②	Jack reserved for AC power cable locking strap
③	AC power socket

The Accessories for S1730S-S48T4S-A

Modules and Cables:

Product	Description
eSFP-GE-SX-MM850	Optical Transceiver, eSFP, GE, Multi-mode Module (850nm, 0.55km, LC)
SFP-GE-LX-SM1310	Optical Transceiver, eSFP, GE, Single-mode Module (1310nm, 10km, LC)
S-SFP-GE-LH40-SM1310	Optical Transceiver, eSFP, GE, Single-mode Module (1310nm, 40km, LC)
S-SFP-GE-LH40-SM1550	Optical Transceiver, eSFP, GE, Single-mode Module (1550nm, 40km, LC)
S-SFP-GE-LH80-SM1550	Optical Transceiver, eSFP, GE, Single-mode Module (1550nm, 80km, LC)
eSFP-GE-ZX100-SM1550	Optical Transceiver, eSFP, GE, Single-mode Module (1550nm, 100km, LC)
SFP-GE-LX-SM1310-BIDI	Optical Transceiver, eSFP, GE, BIDI Single-mode Module (TX1310/RX1490, 10km, LC)
SFP-GE-LX-SM1310-BIDI	BiDi Transceiver, eSFP, Tx1310nm/Rx1490nm, 1.25Gb/s, -9dBm, -3dBm, -19.5dBm, LC, SM, 10km
SFP-GE-LX-SM1490-BIDI	Optical Transceiver, eSFP, GE, BIDI Single-mode Module (TX1490/RX1310, 10km, LC)
SFP-GE-LX-SM1490-BIDI	BiDi Transceiver, eSFP, Tx1490nm/Rx1310nm, 1.25Gb/s, -9dBm, -3dBm, -19.5dBm, LC, SM, 10km
CWDM-SFPGE-1471	CWDM Optical Transceiver, eSFP, 2.5G, Single-mode Module (1471nm, 80km, LC)

Datasheet

CWDM-SFPGE-1491	CWDM Optical Transceiver, eSFP, 2.5G, Single-mode Module (1491nm, 80km, LC)
CWDM-SFPGE-1511	CWDM Optical Transceiver, eSFP, 2.5G, Single-mode Module (1511nm, 80km, LC)
DWDM-SFPGE-1560-61	DWDM Optical Transceiver.eSFP.2.5G.Single-mode Module (1560.61nm.120km.LC)
SFP-1000BaseT	1000BASE-T (RJ45) SFP Electrical Module, Auto Negotiate, 100m

Compare to Similar Items

Model	S1730S-S24T4S-A	S1730S-S24P4S-A	S1730S-S48T4S-A	S1730S-S48P4S-A	S1730S-S24T4X-A
Forwarding Performance	41.66 mpps	41.66 mpps	77.38 mpps	77.38 mpps	95.23 mpps
Switching Capacity	168 Gbit/s	168 Gbit/s	216 Gbit/s	216 Gbit/s	168 Gbit/s
Fixed Ports	24 x 10/100/1000Base-T Ethernet ports, 4 x GE SFP ports	24 x 10/100/1000Base-T (PoE+) ports, 4 x GE SFP ports	48 x 10/100/1000Base-T Ethernet ports, 4 x GE SFP ports	48 x 10/100/1000Base-T (PoE+) ports, 4 x GE SFP ports	24 x 10/100/1000Base-T Ethernet ports, 4 x 10GE SFP+ ports

Get more information:

Do you have any question about the S1730S-S48T4S-A 98010902?

Contact us now via e-mail: info@hi-network.com

Specific Data Sheet:

Part Number	98010902
Model	S1730S-S48T4S-A
Description	S1730S-S48T4S-A (48*10/100/1000BASE-T ports, 4*GE SFP ports, AC power)
First supported version	V200R019C00
Dimensions without packaging (H x W x D) [mm(in.)]	Basic dimensions (excluding the parts protruding from the body): 43.6 mm x 442.0 mm x 220.0 mm (1.72 in. x 17.4 in. x 8.7 in.) Maximum dimensions (the depth is the distance from ports on the front panel to the parts protruding from the rear panel): 43.6 mm x 442.0 mm x 227.0 mm (1.72 in. x 17.4 in. x 8.94 in.)
Chassis height [U]	1
Weight with packaging [kg(lb)]	4.42
Typical power consumption [W]	37
Typical heat dissipation [BTU/hour]	126.25
Maximum power consumption [W]	53
Maximum heat dissipation [BTU/hour]	180.8
MTBF [year]	46.36

Datasheet

MTTR [hour]	2
Availability	>0.99999
Noise at normal temperature (acoustic power) [dB(A)]	53.3
Noise at normal temperature (acoustic pressure) [dB(A)]	38.5
Number of card slots	0
Number of power slots	0
Number of fans modules	1
Redundant power supply	Not supported
Long-term operating temperature [°C(°F)]	-5°C to +50°C (23°F to 122°F) at an altitude of 0-1800 m (0-5906 ft.)
Short-term operating temperature [°C(°F)]	-5°C to +55°C (23°F to 131°F) at an altitude of 0-1800 m (0-5906 ft.)
Restriction on the operating temperature variation rate [°C(°F)]	<p>When the altitude is 1800-5000 m (5906-16404 ft.), the highest operating temperature reduces by 1°C (1.8°F) every time the altitude increases by 220 m (722 ft.).</p> <p>The equipment can operate beyond the normal operating temperature range for a short-term period, but the following conditions must be met:</p> <ul style="list-style-type: none"> - The equipment operates at a temperature of over 50°C (122°F) consecutively for at most 96 hours in one year. - The equipment operates at a temperature of over 50°C (122°F) for a total of no more than 360 hours in one year. - The equipment operates at a temperature of over 50°C (122°F) for no more in 15 times in one year. <p>The equipment may be damaged or experience unexpected exceptions if any of the preceding limits is exceeded.</p> <p>The equipment cannot start when the temperature is lower than 0°C (32°F). The maximum distance of optical modules used in these conditions cannot exceed 10 km.</p>
Storage temperature [°C(°F)]	-40°C to +70°C (-40°F to +158°F)
Long-term operating relative humidity [RH]	5% to 95%, noncondensing
Long-term operating altitude [m(ft.)]	0-5000 m (0-16404 ft.)
Storage altitude [m(ft.)]	0-5000 m (0-16404 ft.)
Power supply mode	AC built-in
Rated input voltage [V]	- AC input: 100 V AC to 240 V AC, 50/60 Hz - High-Voltage DC input: 240 V DC
Input voltage range [V]	- AC input: 90 V AC to 264 V AC, 47 Hz to 63 Hz - High-Voltage DC input: 190 V DC to 290 V DC
Memory	1 GB
Flash memory	512 MB in total. To view the available flash memory size, run the display version command.
Console port	RJ45
Eth Management port	RJ45
USB	Supported
RTC	Not supported

Datasheet

RPS input	Not supported
Service port surge protection [kV]	Common mode: ± 7 kV
Power supply surge protection [kV]	± 6 kV in differential mode, ± 6 kV in common mode
Types of fans	Built-in
Heat dissipation mode	Heat dissipation with fan, intelligent fan speed adjustment
Airflow direction	Air intake from left, front and right, air exhaustion from behind
PoE	Supported
Certification	EMC certification Safety certification Manufacturing certification

Want to Buy

[Get a Quote](#)

[Learn More](#) about Hi-Network

[Search](#) our Resource Library

[Follow](#) us on LinkedIn

 Contact for [Sales or Support](#)

Contact HI-NETWORK.COM For Global Fast Shipping

HongKong Office Tel: +00852-66181601

HangZhou Office Tel: +0086-571-86729517

 Email: info@hi-network.com

Skype: echo.hinetwork

WhatsApp Business: +8618057156223