

Datasheet

[Get a Quote](#)

Overview


Huawei S1730S-L4P4T-A is one of the Huawei S1730 unmanaged switches, with 8 10/100/1000BASE-T Ethernet ports, 4-port PoE+, and AC power supply. The S1700 unmanaged switch is deployed at the access layer of an enterprise network to deliver cost-effective packet switching capability. It provides high quality data transmission for enterprises. The S1700 unmanaged switch helps enterprises construct reliable networks that have high scalability.

Quick Specification

Model	S1730S-L4P4T-A
Part Number	98010893
PoE	Supported
Weight (including packaging)	2.47 kg (5.45 lb)
Dimensions without packaging (H x W x D) [mm(in.)]	<p>Basic dimensions (excluding the parts protruding from the body): 43.6 mm x 250 mm x 180 mm (1.72 in. x 9.84 in. x 7.09 in.)</p> <p>Maximum dimensions (the depth is the distance from ports on the front panel to the parts protruding from the rear panel): 43.6 mm x 250 mm x 185.4 mm (1.72 in. x 9.84 in. x 7.30 in.)</p>

Product Details:

The Front Panel:

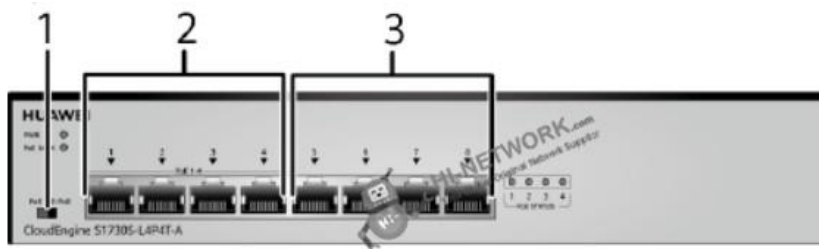


①	PD compatibility check button
②	Four PoE+ 10/100/1000BASE-T ports

Datasheet

③	Four 10/100/1000BASE-T ports
---	------------------------------

The Back Panel:

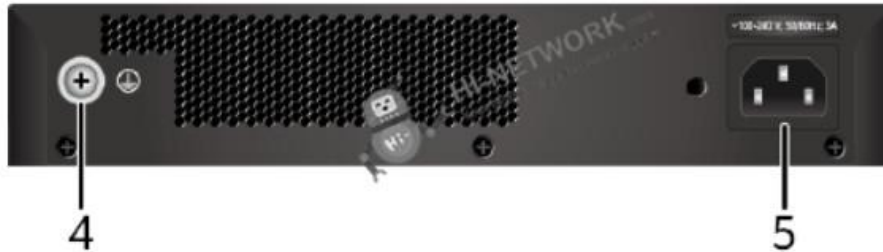

④	Ground screw
⑤	AC power socket

Compare to Similar Items

Model	S1730S-L4P4T-A	S1730S-L8T-A
Ports	8 10/100/1000BASE-T Ethernet ports	8 10/100/1000BASE-T ports
PoE	Supported	Not supported
Dimensions (H x W x D)	<ul style="list-style-type: none"> • Basic dimensions (excluding the parts protruding from the body): 43.6 mm x 250 mm x 180 mm (1.72 in. x 9.84 in. x 7.09 in.) • Maximum dimensions (the depth is the distance from ports on the front panel to the parts protruding from the rear panel): 43.6 mm x 250 mm x 185.4 mm (1.72 in. x 9.84 in. x 7.30 in.) 	160mm×120mm×28mm

Get more information:

Do you have any question about the S1730S-L4P4T-A 98010893?

Contact us now via e-mail: info@hi-network.com

Specific Data Sheet:

Part Number	98010893
-------------	----------

Datasheet

Model	S1730S-L4P4T-A
Dimensions (H x W x D)	Basic dimensions (excluding the parts protruding from the body): 43.6 mm x 250 mm x 180 mm (1.72 in. x 9.84 in. x 7.09 in.) Maximum dimensions (the depth is the distance from ports on the front panel to the parts protruding from the rear panel): 43.6 mm x 250 mm x 185.4 mm (1.72 in. x 9.84 in. x 7.30 in.)
Weight (including packaging)	2.47 kg (5.45 lb)
Service port surge protection	Common mode: ± 7 kV
Power supply surge protection	± 6 kV in differential mode, ± 6 kV in common mode
PoE	Supported
Rated voltage range	100 V AC to 240 V AC, 50/60 Hz
Maximum voltage range	90 V AC to 264 V AC, 47 Hz to 63 Hz
Maximum power consumption (100% throughput)	Without PoE: 10 W 100% PoE loads: 144 W (PoE: 124 W)
Typical power consumption (30% of traffic load)	8 W
Operating temperature	-5°C to +45°C (23°F to 113°F) at an altitude of 0-1800 m (0-5906 ft.)
Storage temperature	-40°C to +70°C (-40°F to +158°F)
Noise under normal temperature (27°C, sound power)	Noise-free (no fans)
Relative humidity	5% to 95%, noncondensing
Operating altitude	0-5000 m (0-16404 ft.)

Want to Buy

[Get a Quote](#)

[Learn More](#) about Hi-Network

[Search](#) our Resource Library

[Follow](#) us on LinkedIn

 Contact for [Sales or Support](#)

Contact HI-NETWORK.COM For Global Fast Shipping

HongKong Office Tel: +00852-66181601

HangZhou Office Tel: +0086-571-86729517



S1730S-L4P4T-A (98010893)



Datasheet

Email: info@hi-network.com

Skype: [echo.hinetwork](https://www.skype.com/people/echo.hinetwork)

WhatsApp Business: [+8618057156223](https://wa.me/8618057156223)

