

Datasheet

[Get a Quote](#)

Overview

S5720-28X-PWH-LI-AC, Huawei S5700 Series Switches


Quick Specification

Model	S5720-28X-PWH-LI-AC
Part Number	98010659
Memory (RAM)	512 MB
Flash	512 MB in total. To view the available flash memory size, run the display version command.
PoE	Supported
Weight with packaging [kg(lb)]	5.9 kg (13.01 lb)
Dimensions (H x W x D)	<p>Basic dimensions (excluding the parts protruding from the body): 43.6 mm x 442.0 mm x 314.9 mm (1.72 in. x 17.4 in. x 12.39 in.)</p> <p>Maximum dimensions (the depth is the distance from ports on the front panel to the parts protruding from the rear panel): 43.6 mm x 442.0 mm x 323.9 mm (1.72 in. x 17.4 in. x 12.75 in.)</p>

Datasheet

Product Details:

Appearance:

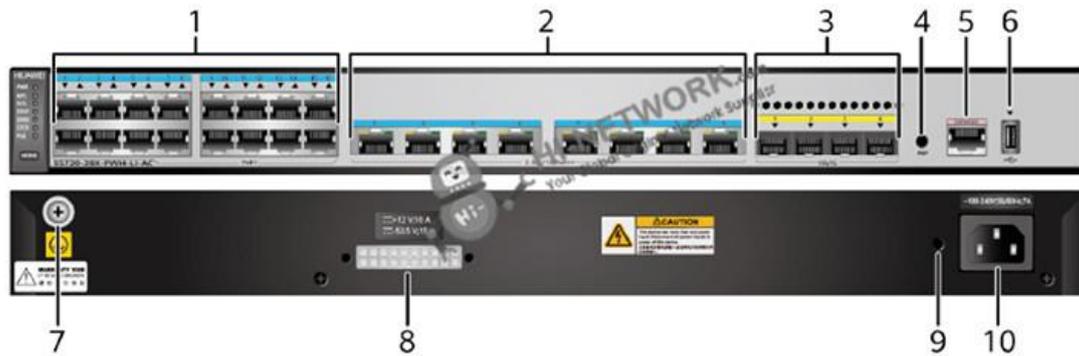

①	Sixteen PoE+ 10/100/1000BASE-T ports
②	Eight PoE++ 100M/1000M/2.5G BASE-T ports (MultiGE port)
③	Four 10GE SFP+ ports
④	One PNP button
⑤	One console port
⑥	One USB port
⑦	Ground screw
⑧	RPS socket
⑨	Jack for AC power cable locking strap
⑩	AC socket

Get more information:

Do you have any question about the S5720-28X-PWH-LI-AC 98010659?

Contact us now via e-mail: info@hi-network.com

Specific Data Sheet:

Part Number	98010659
Model	S5720-28X-PWH-LI-AC
Memory (RAM)	512 MB
Flash	512 MB in total. To view the available flash memory size, run the display version command.

Datasheet

Mean time between failures (MTBF)	50.6 years
Mean time to repair (MTTR)	2
Availability	> 0.99999
Service port surge protection	Common mode: ± 7 kV
Power supply surge protection	± 6 kV in differential mode, ± 6 kV in common mode
Dimensions (H x W x D)	Basic dimensions (excluding the parts protruding from the body): 43.6 mm x 442.0 mm x 314.9 mm (1.72 in. x 17.4 in. x 12.39 in.) Maximum dimensions (the depth is the distance from ports on the front panel to the parts protruding from the rear panel): 43.6 mm x 442.0 mm x 323.9 mm (1.72 in. x 17.4 in. x 12.75 in.)
Weight (with packaging)	5.9 kg (13.01 lb)
Stack ports	Sixteen 10/100/1000BASE-T ports and four 10GE SFP+ ports
RTC	Not supported
RPS	Supported
PoE	Supported
Rated voltage range	100 V AC to 240 V AC, 50/60 Hz
Maximum voltage range	90 V AC to 264 V AC, 47 Hz to 63 Hz
Maximum power consumption (100% throughput, full speed of fans)	Not providing the PoE function: 67.3 W 100% PoE loads: 473 W (system power consumption: 113 W, PoE: 360 W)
Typical power consumption (30% of traffic load) <ul style="list-style-type: none"> • Tested according to ATIS standard • EEE enabled • No PoE power consumption 	51.6 W
Operating temperature	0°C to 45°C (32°F to 113°F) at an altitude of 0-1800 m (0-5906 ft.)
Short-term operating temperature	-5°C to +50°C (23°F to 122°F) at an altitude of 0-1800 m (0-5906 ft.)
Storage temperature	-40°C to +70°C (-40°F to +158°F)
Noise under normal temperature (27°C, sound power)	< 55.2 dB(A)
Relative humidity	5% to 95%, noncondensing
Operating altitude	0-5000 m (0-16404 ft.)
Certification	EMC certification Safety certification Manufacturing certification

Want to Buy

Get a Quote



[Learn More](#) about Hi-Network



[Search](#) our Resource Library



[Follow](#) us on LinkedIn



Contact for [Sales or Support](#)

Contact HI-NETWORK.COM For Global Fast Shipping

HongKong Office Tel: +00852-66181601

HangZhou Office Tel: +0086-571-86729517

Email: info@hi-network.com

Skype: [echo.hinetwork](https://www.skype.com/people/echo.hinetwork)

WhatsApp Business: +8618057156223